



GP
ELECTRONICS

DTC144EE


Digital Transistor

DTC144EE Digital Transistor(NPN)

Feature

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

Marking: 26

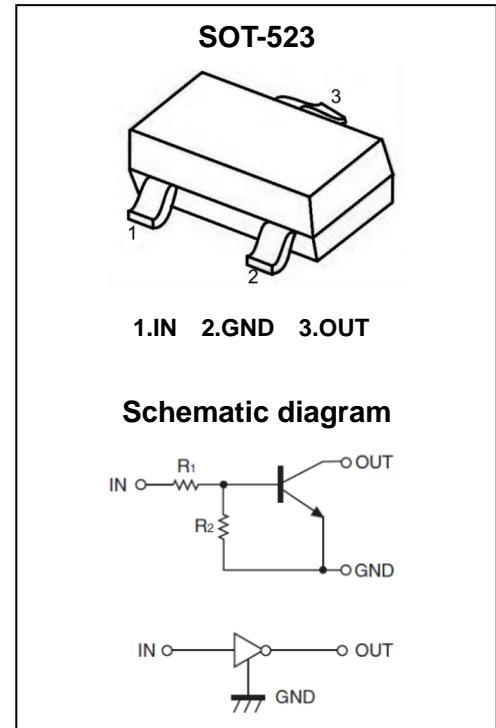





ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	50	V
Input Voltage	V_{IN}	-10~+40	V
Output Current	I_O	100	mA
Power Dissipation	P_D	150	mW
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-45 ~ +125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Input voltage	$V_{I(off)}$	$V_{CC}=5\text{V}$, $I_O=100\mu\text{A}$	0.3			V
	$V_{I(on)}$	$V_O=0.3\text{V}$, $I_O=2\text{mA}$			2.5	V
Output voltage	$V_{O(on)}$	$I_O=10\text{mA}$, $I_L=0.5\text{mA}$			0.3	V
Output current	$I_O(off)$	$V_{CC}=50\text{V}$, $V_I=0\text{V}$			0.5	μA
DC current gain	G_I	$V_O=5\text{V}$, $I_O = 5\text{mA}$	68			
Input resistance	R_I		32.9	47	61.1	$k\Omega$
Resistance ratio	R_2/R_1		0.8	1	1.2	
Transition frequency	f_T	$V_O=10\text{V}$, $I_O=5\text{mA}$, $f=1\text{MHz}$		250		MHz

Typical Characteristics

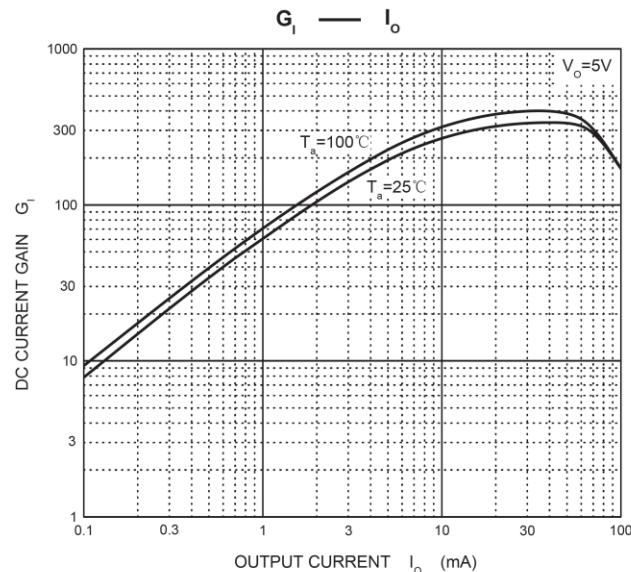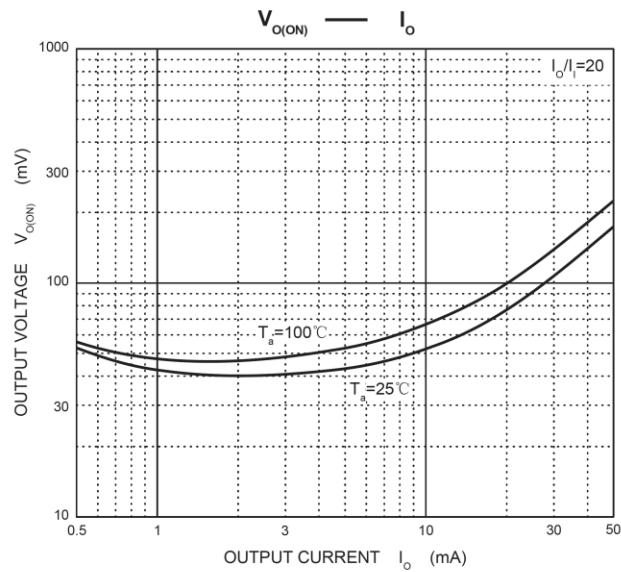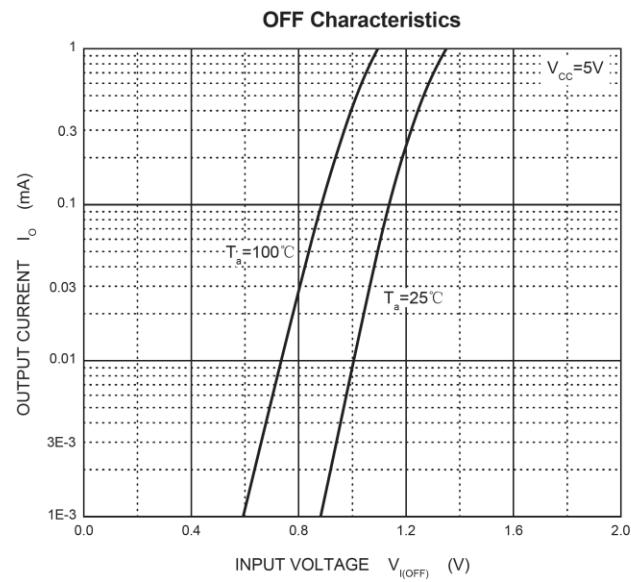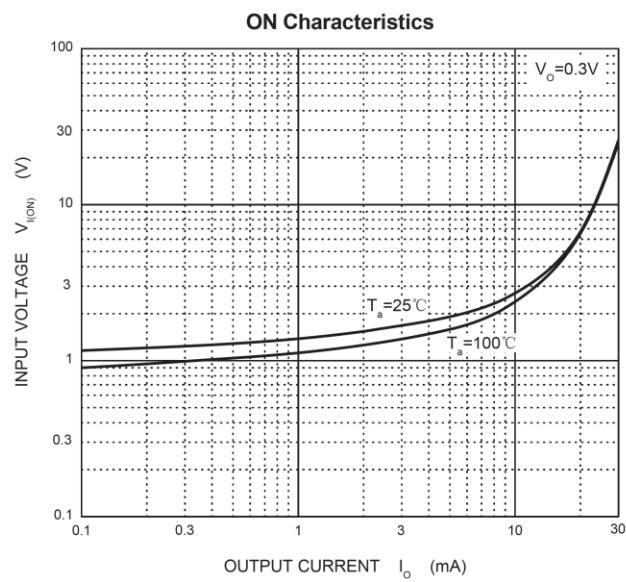

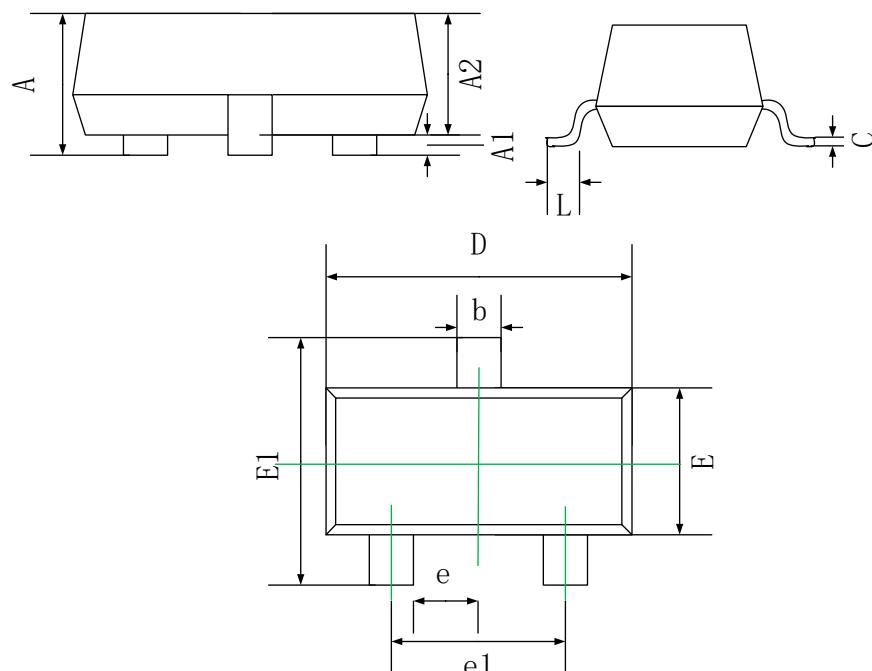SOT-523 Package Information


Symbol	Dimensions In Millimeters	
	Min.	Max.
A	0.70	0.90
A1	0.00	0.10
A2	0.70	0.80
b	0.25	0.35
c	0.10	0.20
D	1.50	1.70
E	0.70	0.90
E1	1.45	1.75
e	0.50 TYP.	
e1	0.90	1.10
L	0.40 REF.	
L1	0.26	0.46

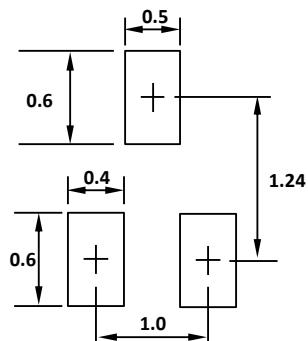SOT-523 Suggested Pad Layout

Note:

1. Controlling dimension:in millimeters.
- 2.General tolerance: $\pm 0.05\text{mm}$.
- 3.The pad layout is for reference purposes only.