



**GP**  
**ELECTRONICS**


**DTC144EM**

Digital Transistor



## DTC144EM Digital Transistor(NPN)

### Feature

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input .They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy

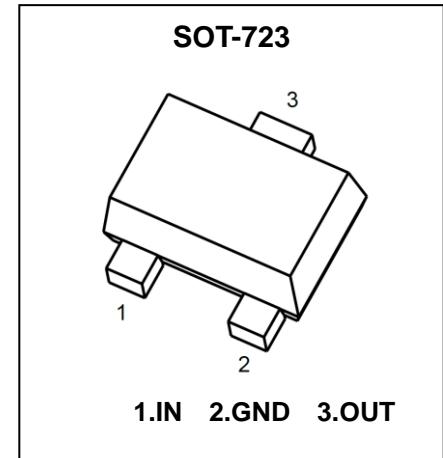

### Schematic diagram

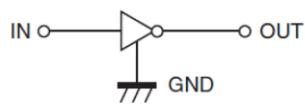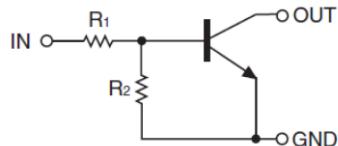

**Marking:** 26





**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)**




Parameter	Symbol	Value	Unit
Supply Voltage	V <sub>CC</sub>	50	V
Input Voltage	V <sub>IN</sub>	-10~+40	V
Output Current	I <sub>O</sub>	100	mA
Power Dissipation	P <sub>D</sub>	150	mW
Junction Temperature	T <sub>J</sub>	125	°C
Storage Temperature Range	T <sub>STG</sub>	-45 ~ +125	°C

**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise noted)**

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Input voltage	V <sub>I(off)</sub>	V <sub>CC</sub> =5V , I <sub>O</sub> =100μA	0.5			V
	V <sub>I(on)</sub>	V <sub>O</sub> =0.3V , I <sub>O</sub> =10mA			3	V
Output voltage	V <sub>O(on)</sub>	I <sub>O</sub> =10mA , I <sub>I</sub> =0.5mA			0.3	V
Input current	I <sub>I</sub>	V <sub>I</sub> =5V			0.88	mA
Output current	I <sub>O(off)</sub>	V <sub>CC</sub> =50V , V <sub>I</sub> =0V			0.5	μA
DC current gain	G <sub>I</sub>	V <sub>O</sub> =5V , I <sub>O</sub> =5mA	30			
Input resistance	R <sub>I</sub>		32.9	47	61.1	kΩ
Resistance ratio	R <sub>2</sub> / R <sub>1</sub>		0.8	1	1.2	
Transition frequency	f <sub>T</sub>	V <sub>O</sub> =10V,I <sub>O</sub> =5mA,f=1MHz		250		MHz

## Typical Characteristics

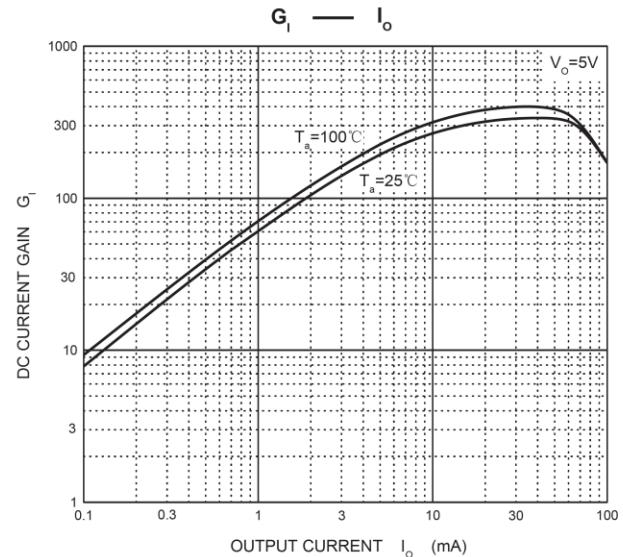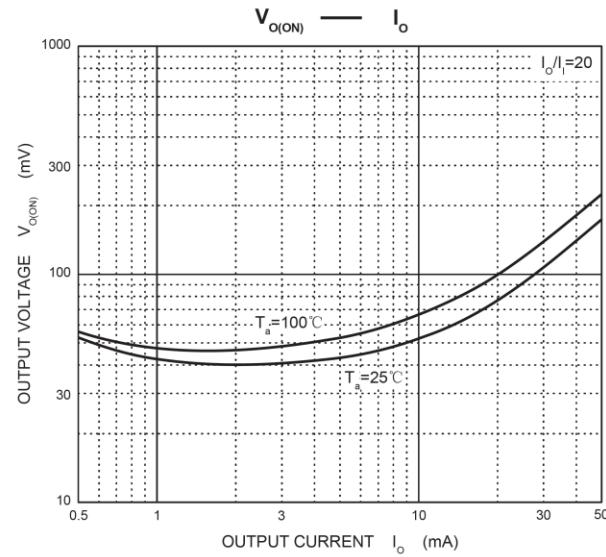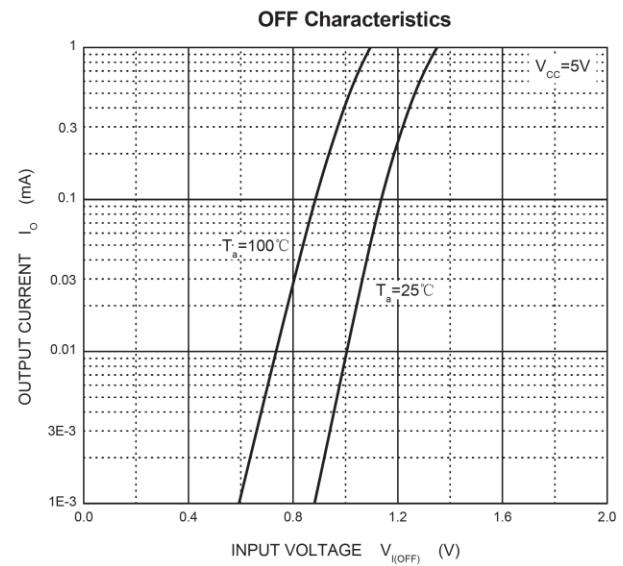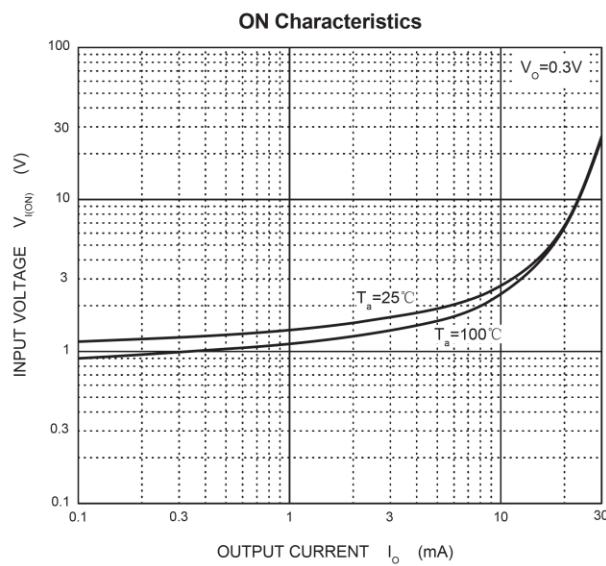

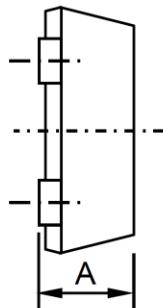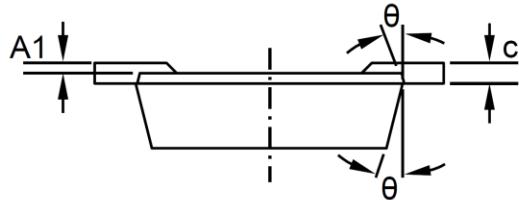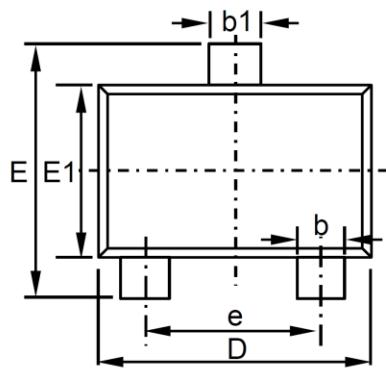**SOT-723 Package Information**

SOT-723 (unit: mm)		
Dim.	Min.	Max.
A	0.40	0.50
A1	0.00	0.05
b	0.15	0.27
b1	0.20	0.37
c	0.06	0.16
D	1.10	1.30
E	1.10	1.30
E1	0.70	0.90
e	0.80 TYP.	
$\theta$	7° REF.	