

Product Summary




$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-20V	70mΩ@-4.5V	-2.3A
	110mΩ@-2.5V	

Feature

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$ and Low Gate Charge

Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch

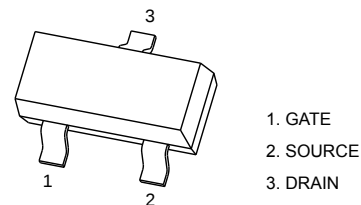MARKING:

SOT-23

Schematic diagram

ABSOLUTE MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	±8	V
Continuous Drain Current	I_D	-2.3	A
Pulsed Drain Current ($t=300\mu\text{s}$)	I_{DM}	-10	A
Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS(T_a=25°C unless otherwise noted)







Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =-250μA	-20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-20V,V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±8V, V _{DS} = 0V			±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.4	-0.7	-1	V
Drain-source on-resistance ^a	R _{DS(on)}	V _{GS} =-4.5V, I _D =-3A		70	90	mΩ
		V _{GS} =-2.5V, I _D =-2A		110	140	
Forward tranconductance ^a	g _{FS}	V _{DS} =-5V, I _D =-2A	5			S
Dynamic characteristics ^b						
Input Capacitance	C _{iss}	V _{DS} =-10V,V _{GS} =0V,f =1MHz		405		pF
Output Capacitance	C _{oss}			75		
Reverse Transfer Capacitance	C _{rss}			55		
Gate resistance	R _g	f =1MHz		6		Ω
Total Gate Charge	Q _g	V _{DS} =-10V,V _{GS} =-2.5V,I _D =-3A		3.3	12	nC
Gate-Source Charge	Q _{gs}			0.7		
Gate-Drain Charge	Q _{gd}			1.3		
Turn-on delay time	t _{d(on)}	V _{DD} =-10V,V _{GEN} =-4.5V,I _D =-1A R _L =10Ω,R _{GEN} =1Ω		11		ns
Turn-on rise time	t _r			35		
Turn-off delay time	t _{d(off)}			30		
Turn-off fall time	t _f			10		
Source-Drain Diode characteristics						
Diode forward current	I _S	T _C =25℃			-3	A
Diode pulsed forward current ^a	I _{SM}				-10	A
Diode Forward voltage	V _{DS}	V _{GS} =0V, I _S =-1.3A			-1.2	V




Notes :

a. Pulse Test : Pulse Width < 300μs, Duty Cycle ≤ 2%.

b. Guaranteed by design, not subject to production testing.

Typical Electrical and Thermal Characteristics

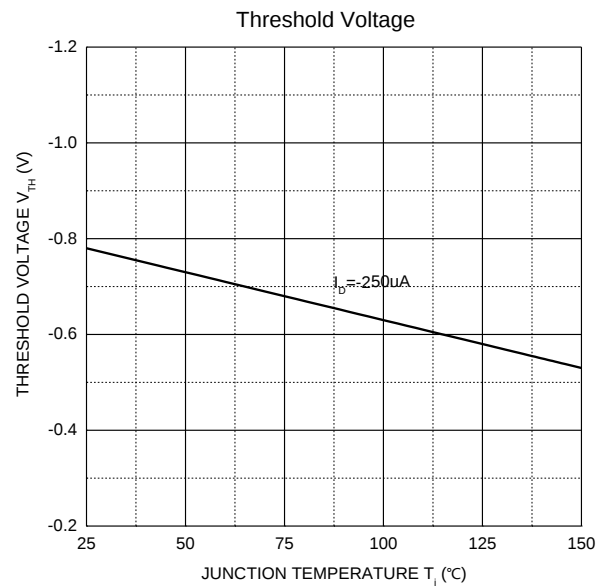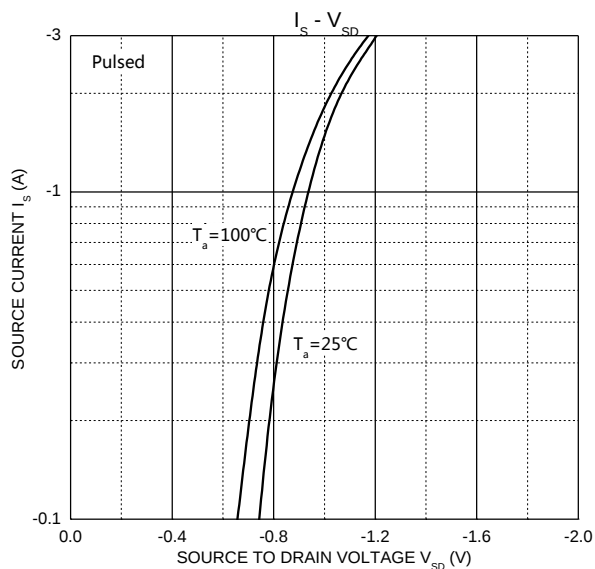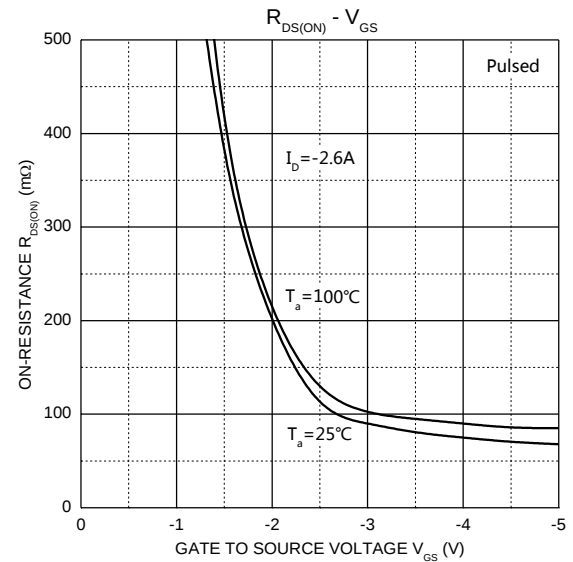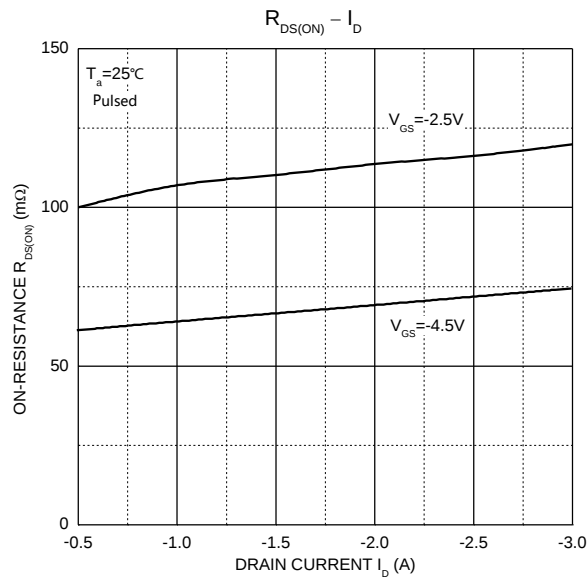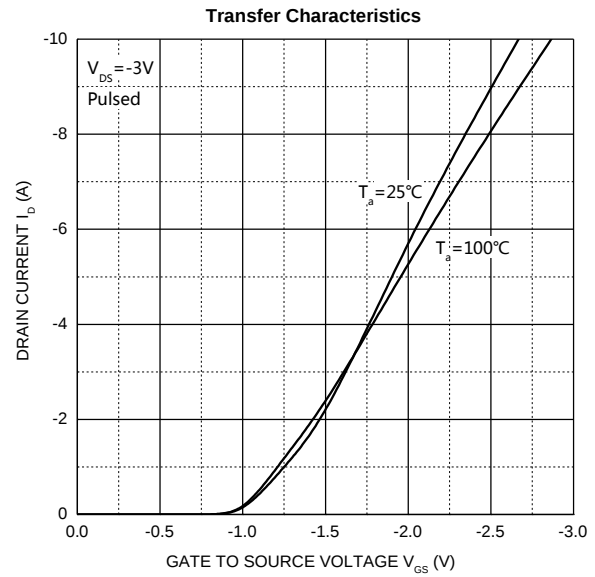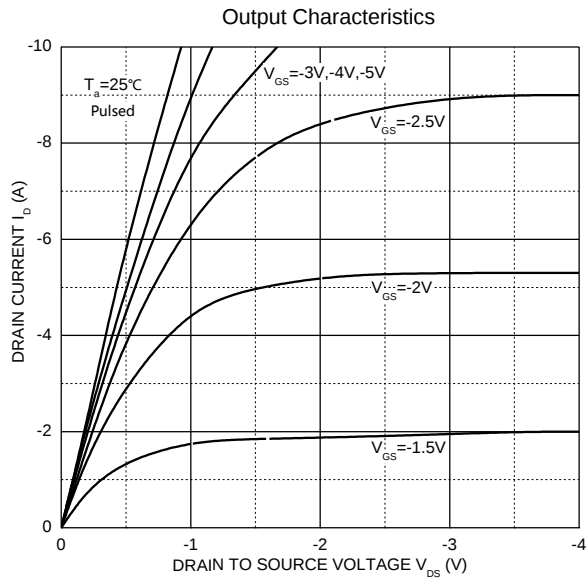


SOT-23 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Tape and Reel


SOT-23 Tape and reel

SOT-23 Embossed Carrier Tape

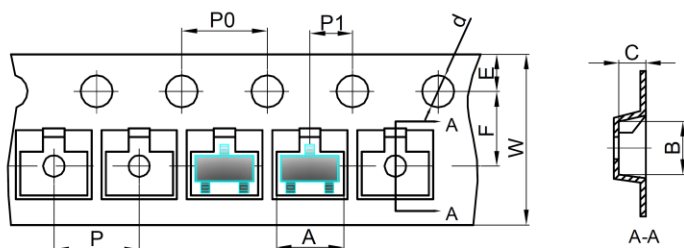


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

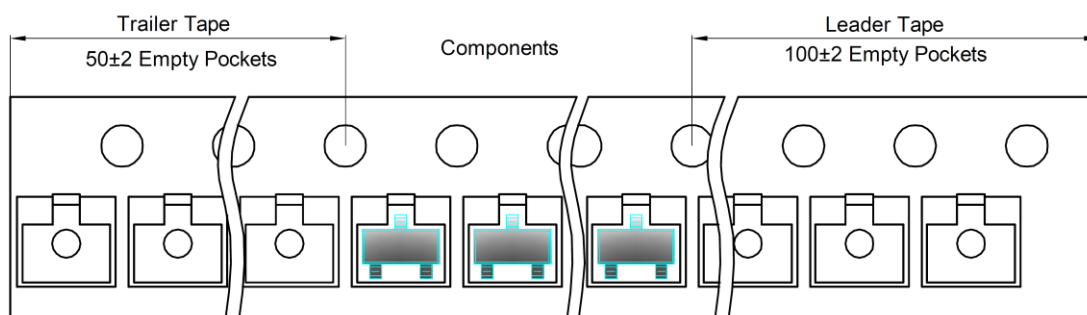

SOT-23 Reel

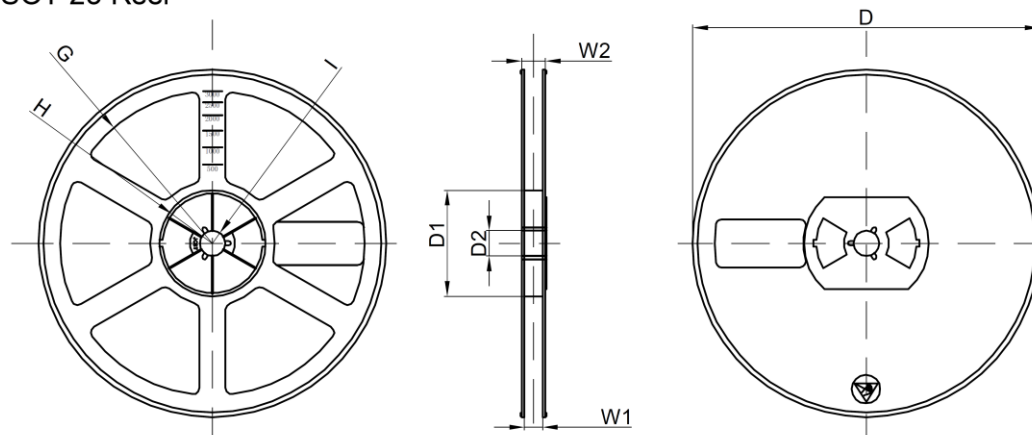

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	