



**GP**  
**ELECTRONICS**

**1N5391-1N5399**

**50~1000V-1.5A General Purpose Rectifier**

### **1N5391-1N5399 General Purpose Rectifier**

#### **Feature**


- $I_o$  1.5A
- $V_{RRM}$  50V-1000V
- Low reverse leakage
- High surge current capability

#### **Application**

- Rectifier

#### **Application**

- 1N539X
- X : From 1 To 9

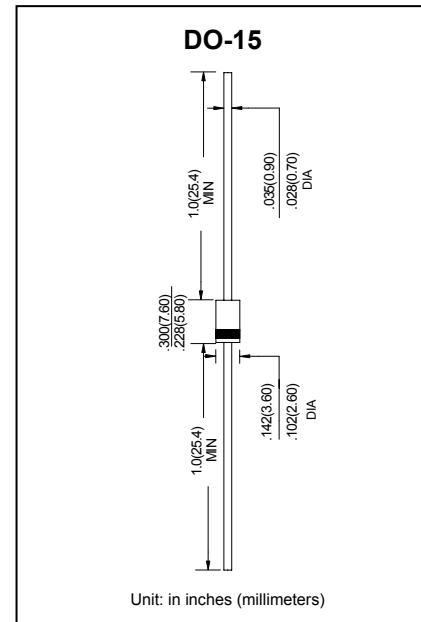

### **ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted)**

Parameter	Symbol	1N53							Unit
		91	92	93	95	97	98	99	
Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Average Forward Current 60Hz Half-sine wave, Resistance load, $T_a=50^\circ\text{C}$	$I_{F(AV)}$	1.5							A
Non-repetitive Peak Forward Surge Current 60Hz Half-sine wave ,1 cycle , $T_a =25^\circ\text{C}$	$I_{FSM}$	50							A
Junction Temperature	$T_J$	-55 ~ +125							°C
Storage Temperature	$T_{STG}$	-55 ~ +150							°C

### **ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ unless otherwise noted)**

Parameter	Symbol	Test Condition		Max				Unit
Peak Forward voltage	$V_{FM}$	$I_{FM}=1.5\text{A}$		1.1				V
Peak Reverse Current	$I_{RRM1}$	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$	5				uA
	$I_{RRM2}$		$T_a=125^\circ\text{C}$	50				uA
Thermal Resistance (Typical)	$R_{\theta J-A}$	Between junction and ambient		25				°C/W
	$R_{\theta J-L}$	Between junction and lead		20				°C/W

## Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

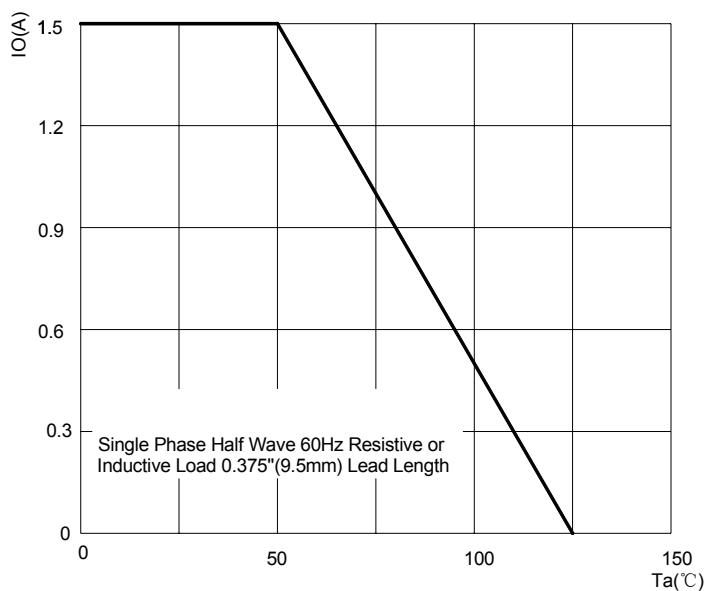


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

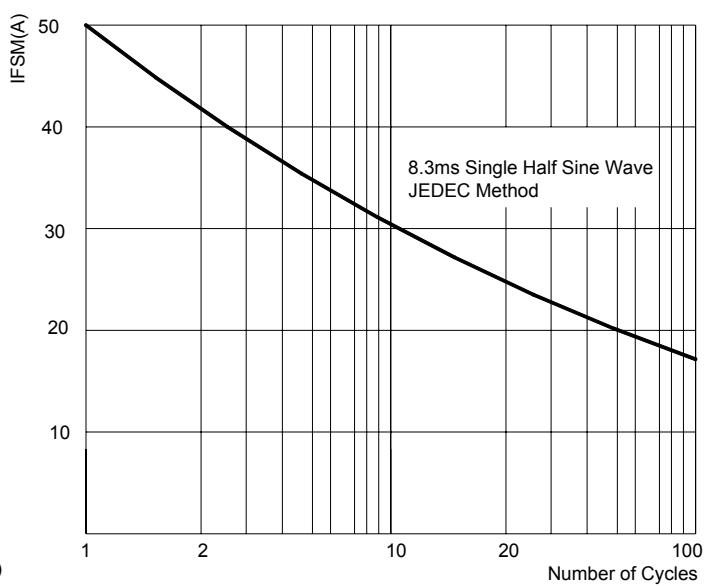


FIG.3: TYPICAL FORWARD CHARACTERISTICS

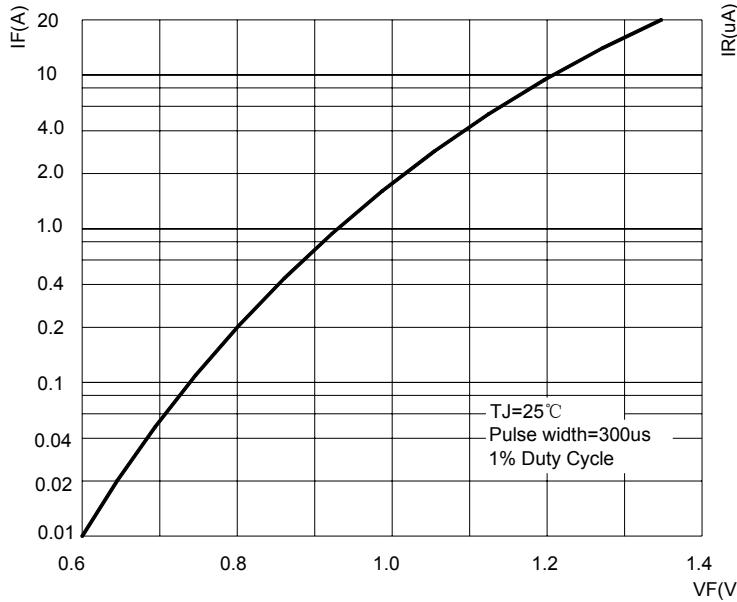


FIG.4: TYPICAL REVERSE CHARACTERISTICS

