



GP
ELECTRONICS

SD103AX

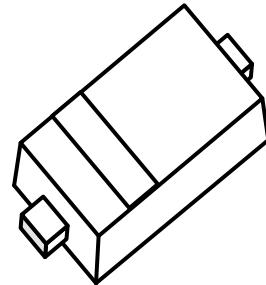
40V-0.35A Schottky Barrier Diode

SD103AX Schottky Barrier Diode

Feature

- Low Forward Voltage Drop
- Low VF
- Low IR
- High Reliability

SOD-523



MARKING:

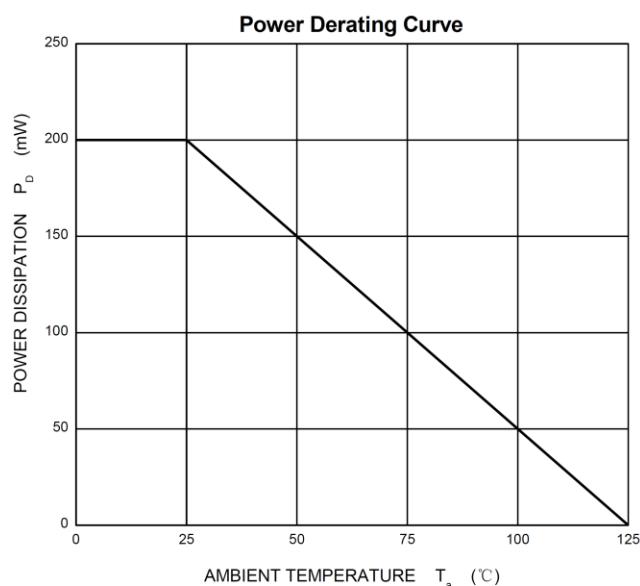
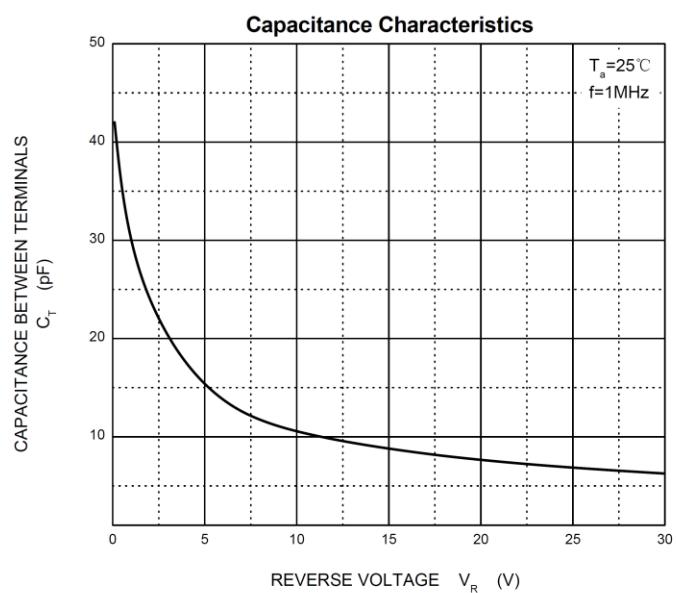
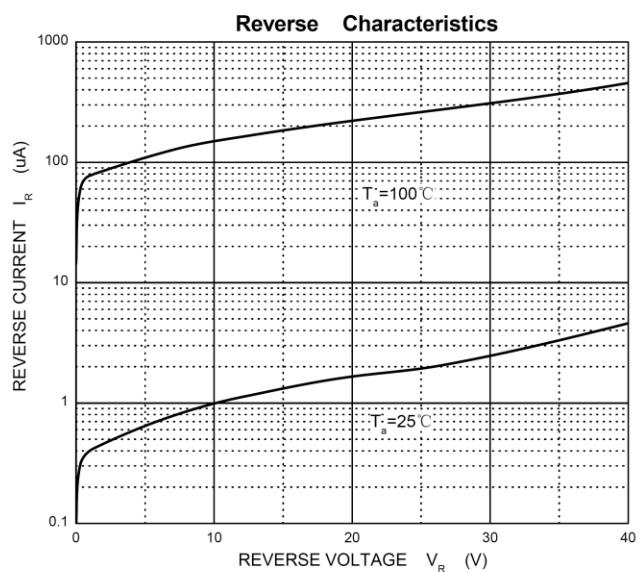
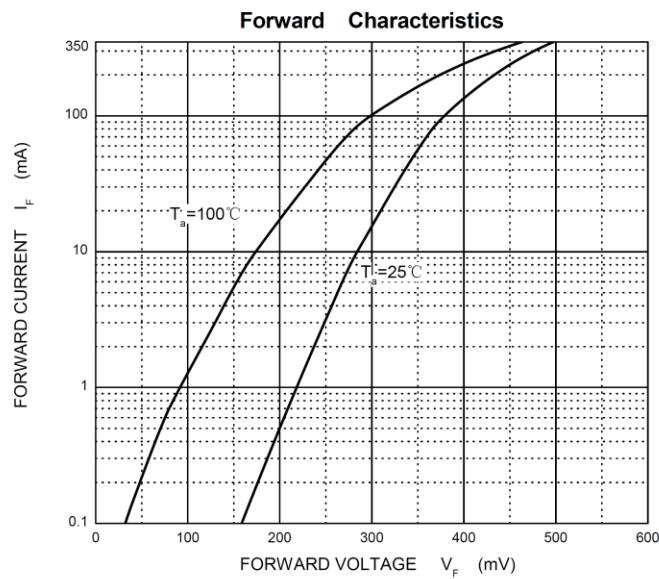


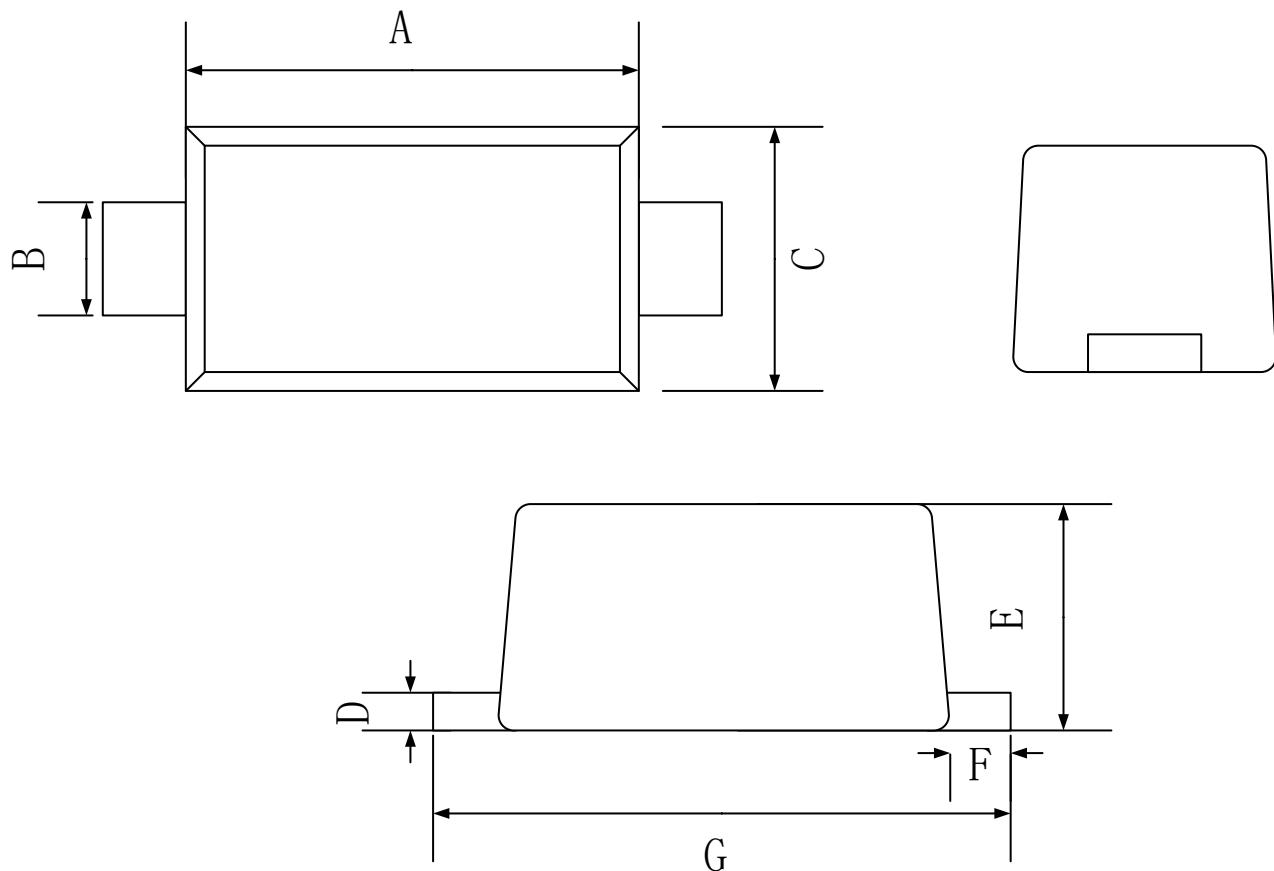
ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
DC reverse voltage	V_R	40	V
Forward Continuous Current	I_{FM}	0.35	A
Non-repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	I_{FSM}	2	A
Power Dissipation	P_D	0.2	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	667	$^\circ\text{C}/\text{W}$
Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Forward voltage	V_F	$I_R = 100\mu\text{A}$	40			V
		$I_F = 1\text{mA}$		0.27		V
		$I_F = 5\text{mA}$		0.32		V
		$I_F = 20\text{mA}$			0.37	V
		$I_F = 200\text{mA}$			0.60	V
Reverse current	I_R	$V_R = 10\text{V}$			1	μA
		$V_R = 20\text{V}$			2	μA
		$V_R = 30\text{V}$			5	μA
Capacitance between terminals	C_T	$V_R=0, f=1\text{MHz}$		50		pF

Typical Characteristics


SOD-523 Package Outline Dimensions


Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	1.10	1.20	1.30
B	0.25	0.30	0.35
C	0.75	0.80	0.85
D	0.08	0.10	0.15
E	0.45	0.65	0.70
F	0.20 REF		
G	1.50	1.60	1.70