



S5A-S5M General Purpose Rectifier

Feature


- I_o 5A
- V_{RRM} 50V-1000V
- Low reverse leakage
- High surge current capability

Application

- Rectifier

Application

- S5X
X : From A To M

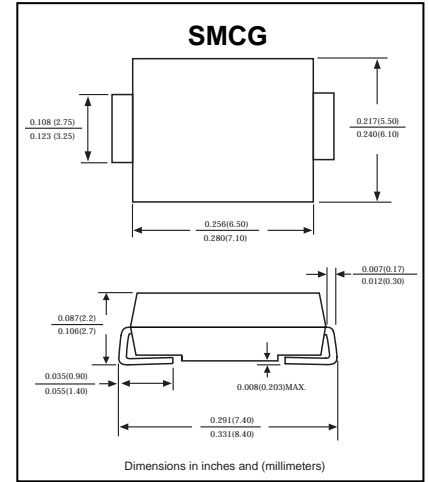

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	S5							Unit
		A	B	D	G	J	K	M	
Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Average Forward Current 60Hz Half-sine wave, Resistance load, $T_L=110^\circ\text{C}$	$I_{F(AV)}$	5							A
Non-repetitive Peak Forward Surge Current 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$	I_{FSM}	100							A
Junction Temperature	T_J	-55 ~ +150							$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150							$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	S5							Unit	
			A	B	D	G	J	K	M		
Peak Forward voltage	V_{FM}	$I_F=5A$	1.15							V	
Peak Reverse Current	I_{RRM1}	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$							10	μA
	I_{RRM2}		$T_a=125^\circ\text{C}$							250	μA
Thermal Resistance (Typical)	$R_{\theta J-A}$	Between junction and ambient	47							$^\circ\text{C}/\text{W}$	
	$R_{\theta J-L}$	Between junction and lead	13							$^\circ\text{C}/\text{W}$	

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

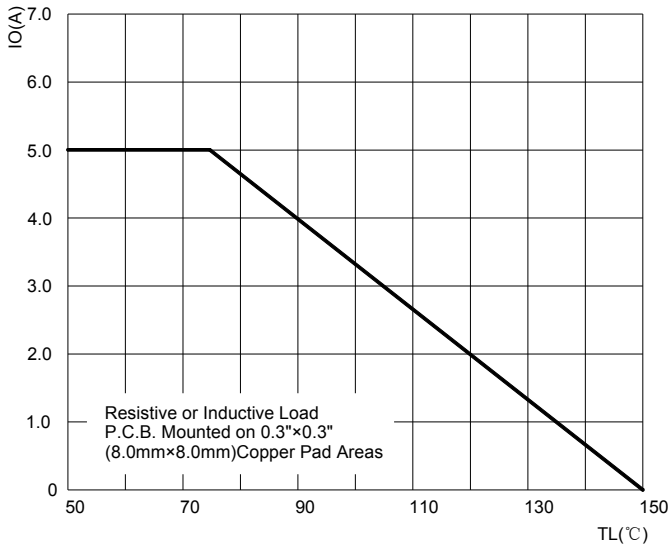


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

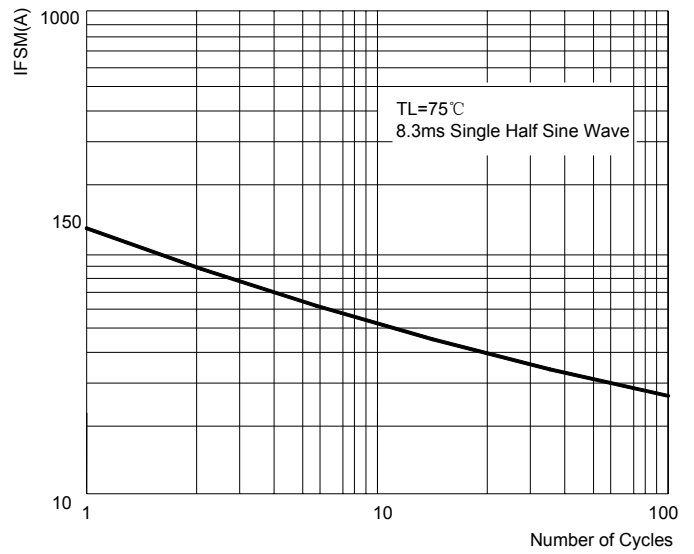


FIG.3: TYPICAL FORWARD CHARACTERISTICS

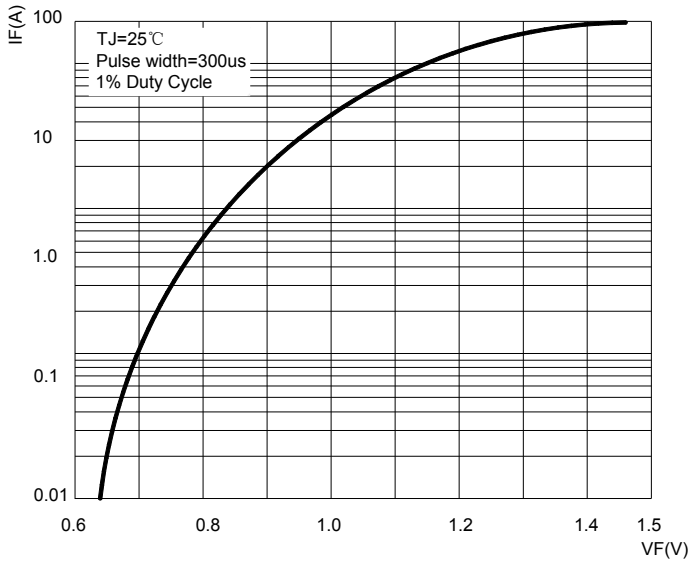


FIG.4: TYPICAL REVERSE CHARACTERISTICS

