



Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-40V	63m Ω @-10V	-5.3A
	98m Ω @-4.5V	


Feature

- TrenchFET Power MOSFET
- Exceptional on-resistance and maximum DC current capability


Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch


MARKING:



SOT-23-3L

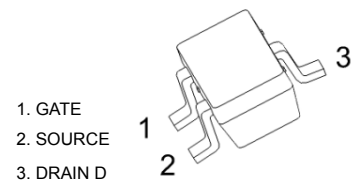

Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-5.3	A
Power Dissipation	P_D	1	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	125	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-40			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -40V, V_{GS} = 0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			100	nA
Gate threshold voltage ⁽¹⁾	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-2.1	-3.0	V
Drain-source on-resistance ⁽¹⁾	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -5.0A$		63	82	m Ω
		$V_{GS} = -4.5V, I_D = -4.0A$		98	126	
Forward transconductance	g_{FS}	$V_{DS} = -5V, I_D = -4.1A$		7		S
Dynamic characteristics⁽²⁾						
Input Capacitance	C_{iss}	$V_{DS} = -20V, V_{GS} = 0V, f = 1MHz$		650		pF
Output Capacitance	C_{oss}			90		
Reverse Transfer Capacitance	C_{rss}			70		
Total Gate Charge	Q_g	$V_{DS} = -20V, I_D = -3.1A, V_{GS} = -10V$		14		nC
Gate-Source Charge	Q_{gs}			2.9		
Gate-Drain Charge	Q_{gd}			3.8		
Switching characteristics⁽²⁾						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -20V, R_L = 2\Omega$ $V_{GS} = -10V, R_{GEN} = 3\Omega$		8		ns
Turn-on rise time	t_r			9		
Turn-off delay time	$t_{d(off)}$			28		
Turn-off fall time	t_f			10		
Source-Drain Diode characteristics						
Diode Forward voltage ⁽¹⁾	V_{DS}	$V_{GS} = 0V, I_S = -2.5A$		-0.87	-1.2	V

Notes:


1. Pulse test; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. Guaranteed by design, not subject to production testing.

Typical Electrical and Thermal Characteristics

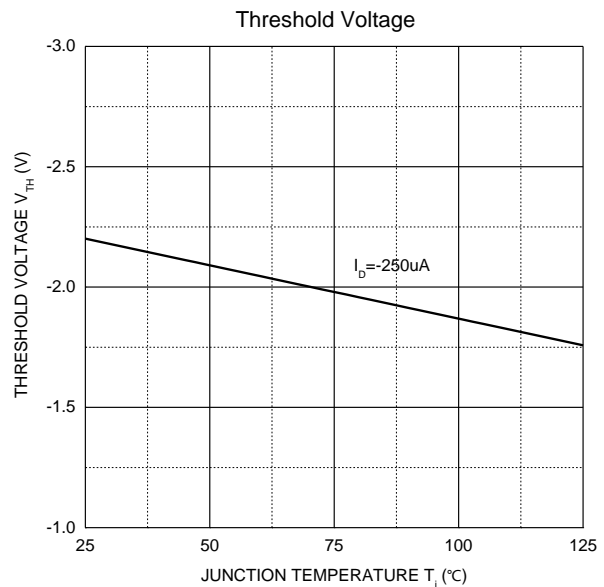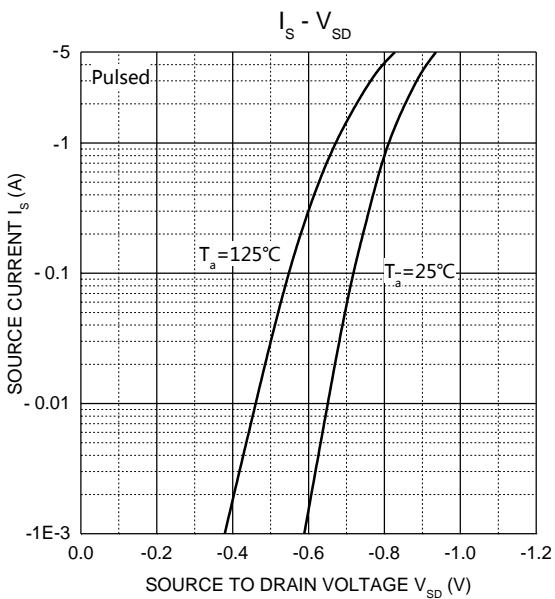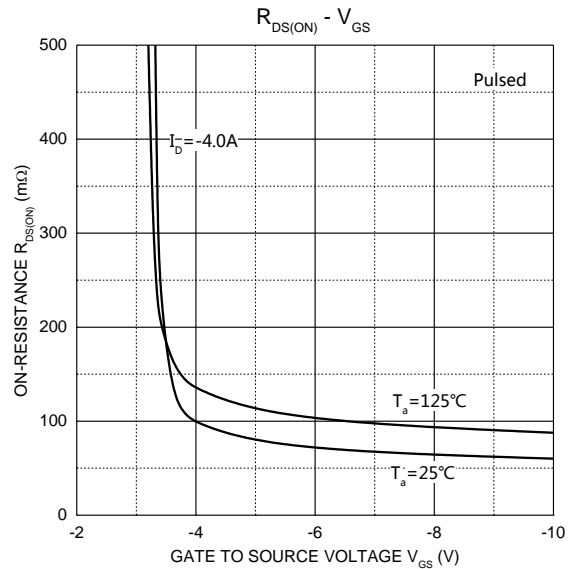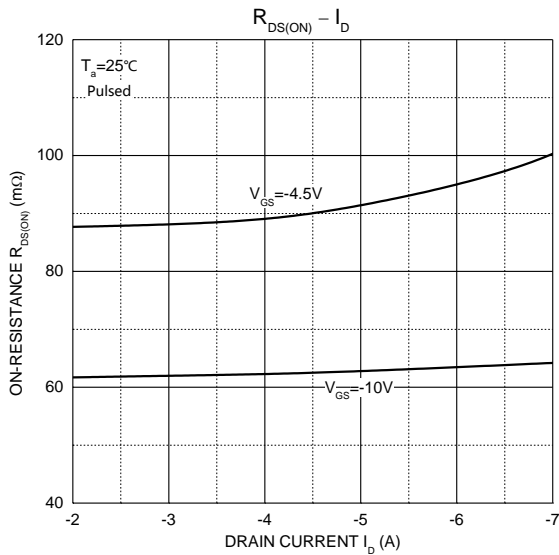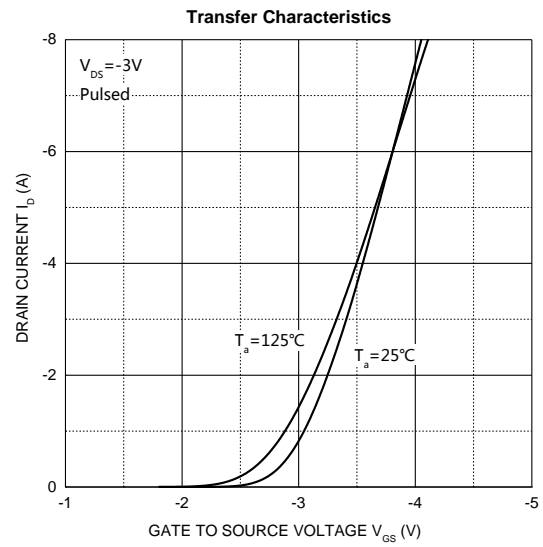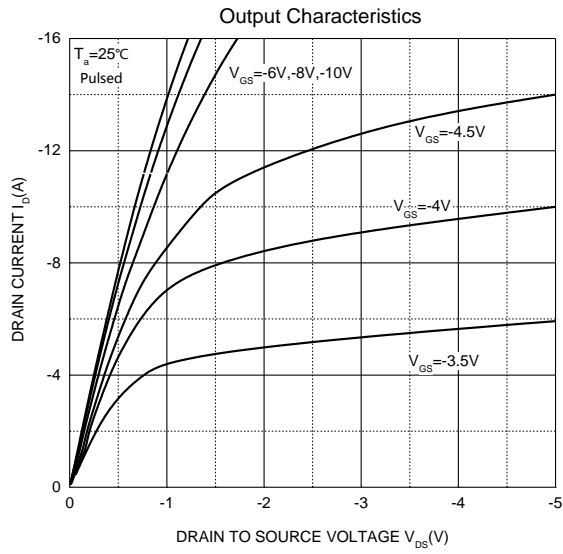

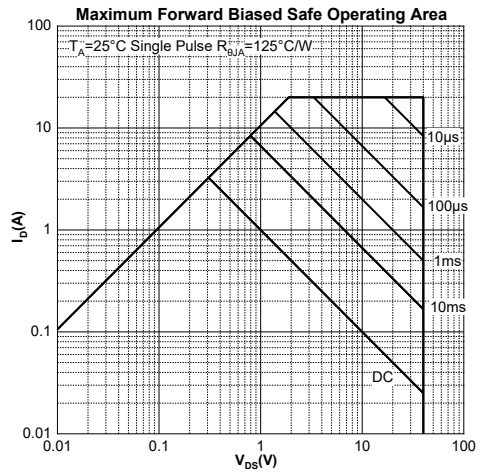

SOT-23-3L Package Information

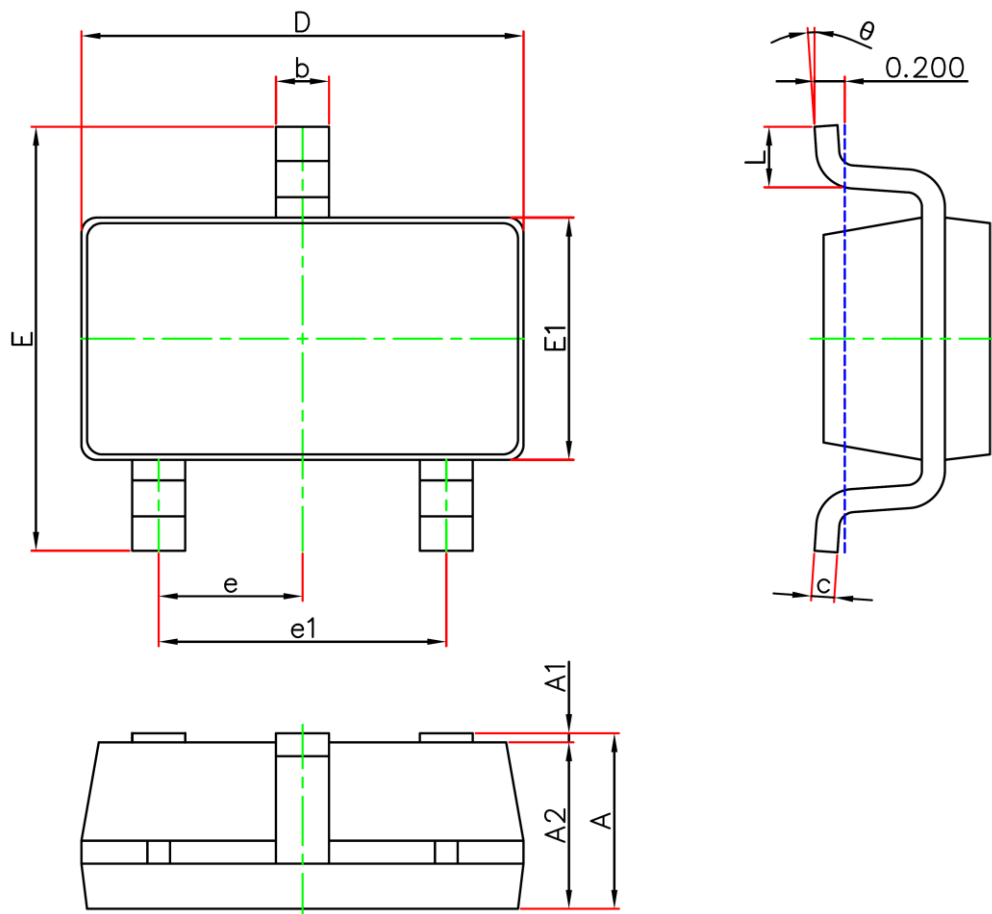

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0	0.150	0.000	0.006
A2	1.050	1.250	0.041	0.049
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.