



GP
ELECTRONICS

GP6721SP

20V Dual N-Channel MOSFET

Product Summary

V _{SSS}	R _{SS(on)TYP}	I _S
20V	4.4mΩ@4.5V	12A
	4.5mΩ@4.0V	
	4.6mΩ@3.8V	
	4.8mΩ@3.1V	
	5.3mΩ@2.5V	


Feature

- Trench Technology
- Common-drain design
- Supper high density cell design
- ESD Diode-Protected Gate
- CSP

Application

- Lithium-ion Battery Charging and Discharging Switch

MARKING:




Top View



Left-right turn



Bottom View

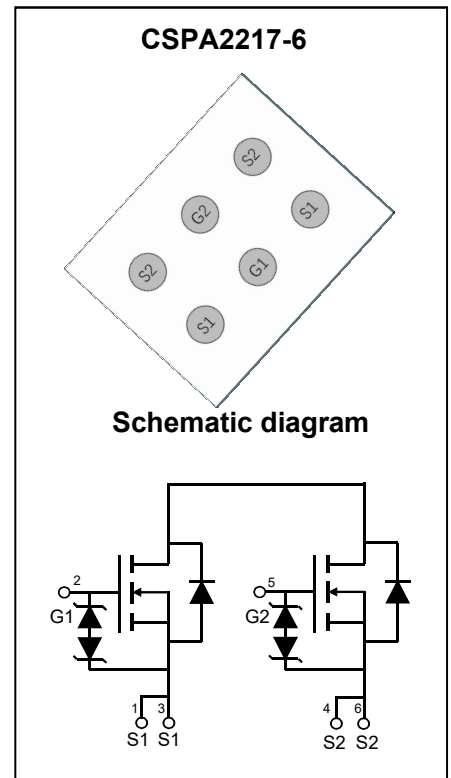

GP6721SP = Device Code Source1:1,3 Gate1:2
 XXXX = Date Code Source2:4,6 Gate2:5
 Solid Dot = Green Indicator

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Source-Source Voltage	V _{SSS}	20	V
Gate-Source Voltage	V _{GS}	±12	V
Source Current	DC ¹	12	A
	Pulse ²	120	A
Total Power Dissipation	DC ¹	2.0	W
Channel Temperature	T _{CH}	150	°C
Storage Temperature	T _{STG}	-55~ +150	°C







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Source-Source Breakdown Voltage	BV _{SSS}	V _{GS} = 0V, I _S = 250uA	20			V
Zero Gate Voltage Source Current	I _{SSS}	V _{SS} = 16V, V _{GS} = 0V			1	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} = ±10V, V _{SS} = 0V			±10	μA
On Characteristics						
Gate-Source Threshold Voltage	V _{GS(th)}	V _{SS} = 10V, I _S = 250uA	0.4	0.7	1.2	V
Source-Source On-Resistance	R _{SS(on)}	V _{GS} = 4.5V, I _S = 3A	2.9	4.4	6.8	mΩ
		V _{GS} = 4.0V, I _S = 3A	3.0	4.5	7.1	
		V _{GS} = 3.8V, I _S = 3A	3.1	4.6	7.3	
		V _{GS} = 3.1V, I _S = 3A	3.4	4.8	8.0	
		V _{GS} = 2.5V, I _S = 3A	4.0	5.3	9.2	
Dynamic Characteristics⁴						
Input Capacitance	C _{iss}	V _{SS} = 10V, V _{GS} = 0V, f = 0.1MHz		2644		pF
Output Capacitance	C _{oss}			273		
Reverse Transfer Capacitance	C _{rss}			83		
Switching Characteristics⁴						
Total Gate Charge	Q _g	V _{SS} = 10V, V _{GS} = 4V, I _S = 5A		33.3		nC
Gate-Source Charge	Q _{gs1}			2.6		
Gate-Drain Charge	Q _{gs2}			6.9		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 10V, V _{GS} = 6V, I _S = 5A		1		ns
Turn-On Rise Time	t _r			3		
Turn-Off Delay Time	t _{d(off)}			6		
Turn-Off Fall Time	t _f			4		
Source-Drain Diode Characteristics						
Diode Forward Voltage	V _{F(S-S)}	V _{GS} = 0V, I _S = 1A			1.0	V




Notes :

1. Mounted on FR-4 board (25.4 mm × 25.4 mm × t1.0 mm) with 1oz. Copper, using the minimum recommended pad size.
2. Pulse Test : Pulse Width = 10μs, duty cycle ≤ 1%.
3. Guaranteed by design, not subject to production testing.

Typical Characteristics

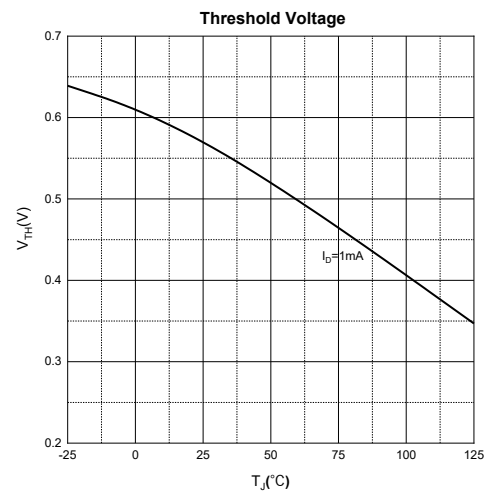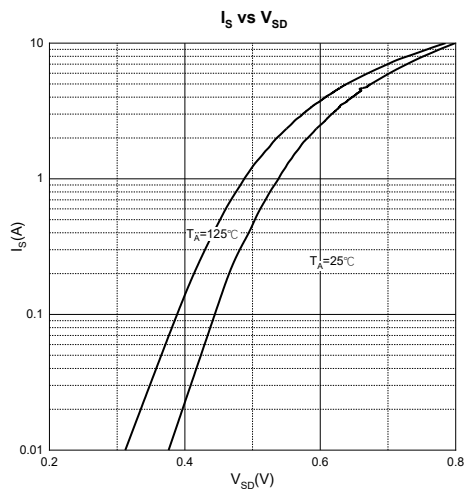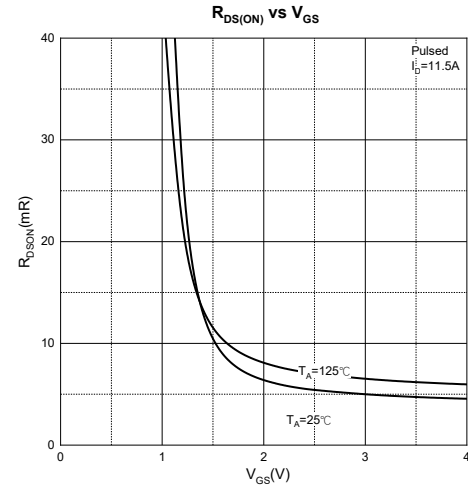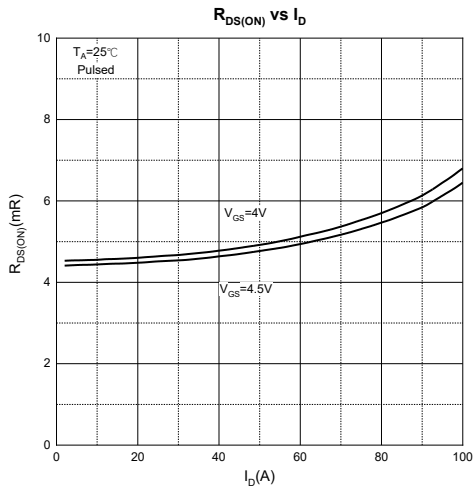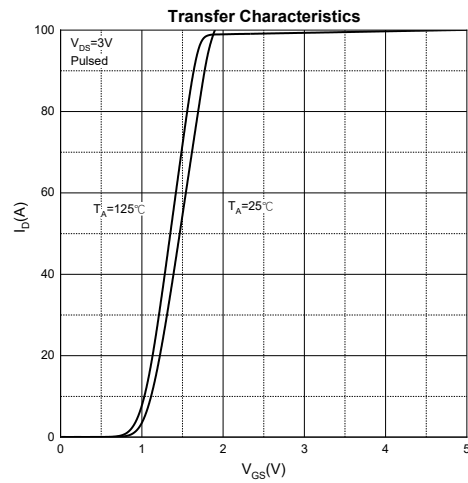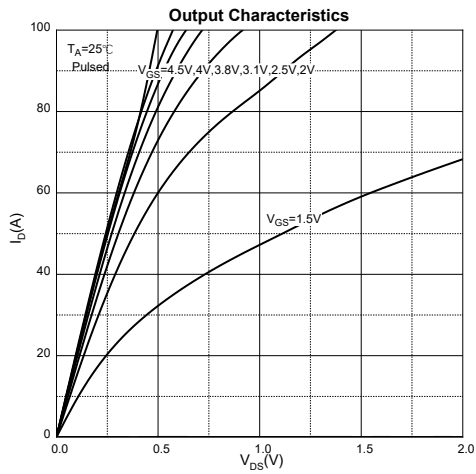

CSPA2217-6 Package Information

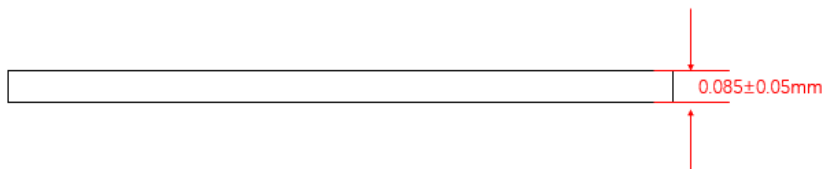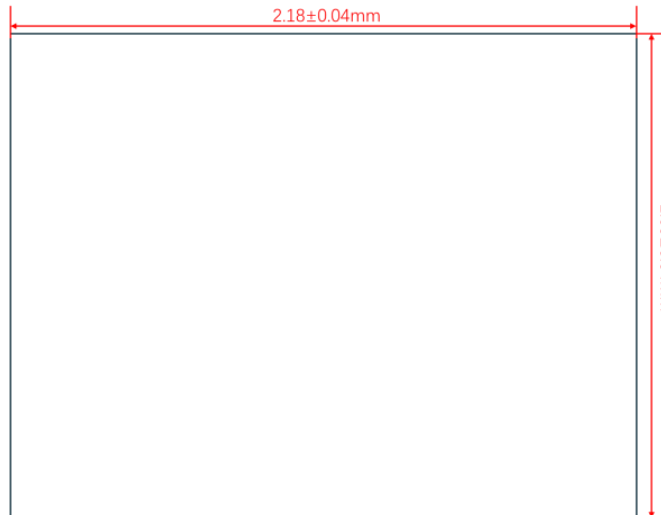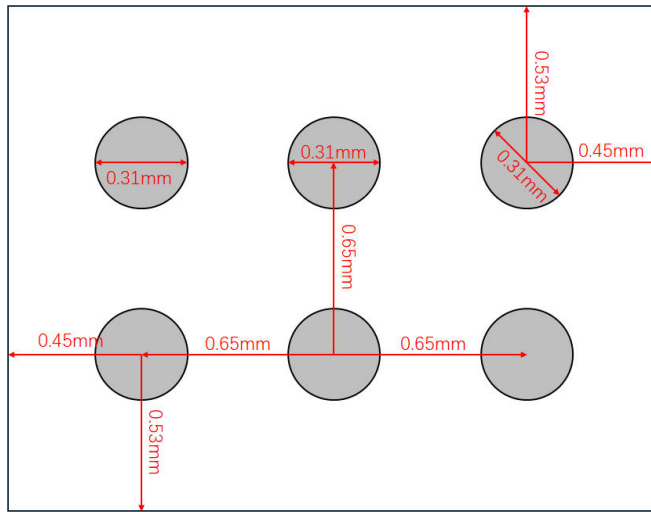

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.