

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
150V	10.5mΩ@10V	83A


Feature


- Split Gate Trench Technology
- Low $R_{DS(on)}$
- Low Gate Charge
- Low Gate Resistance
- 100% UIS Tested

Application

- Power Switching Application
- Hard Switched and High Frequency Circuits
- DC/DC Converter

TO220-3L-C

- 
1. GATE
 2. DRAIN
 3. SOURCE

Schematic diagram

Package Marking and Ordering Information

Part Number	Package	Marking	Packing	Reel Size	Tape Width	Qty
GPT105N15NTB	TO-220-3L-C	T105N15N	Tube	NA	NA	50pcs

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	150	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current ¹	$T_C = 25^{\circ}\text{C}$	I_D	83	A
	$T_C = 100^{\circ}\text{C}$	I_D	52	A
Pulsed Drain Current ²		I_{DM}	332	A
Single Pulsed Avalanche Current ³		I_{AS}	35	A
Single Pulsed Avalanche Energy ³		E_{AS}	306	mJ
Power Dissipation ⁵	$T_C = 25^{\circ}\text{C}$	P_D	174	W
Thermal Resistance from Junction to Ambient ⁶		$R_{\theta JA}$	58	$^{\circ}\text{C/W}$
Thermal Resistance from Junction to Case		$R_{\theta JC}$	0.72	$^{\circ}\text{C/W}$
Junction Temperature		T_J	150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55~ +150	$^{\circ}\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)




Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	150			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 150V, V _{GS} = 0V			1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±150	nA
On Characteristics ⁴						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	2	3.1	4	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 20A		10.5	14.0	mΩ
Dynamic Characteristics						
Input Capacitance	C _{iSS}	V _{DS} = 75V, V _{GS} = 0V, f = 1MHz		2240		pF
Output Capacitance	C _{oSS}			256		
Reverse Transfer Capacitance	C _{rSS}			3.2		
Gate Resistance	R _g	V _{DS} = 0V, V _{GS} = 0V, f = 1MHz		2.8		Ω
Switching Characteristics						
Total Gate Charge	Q _g	V _{DS} = 70V, V _{GS} = 10V, I _D = 20A		31		nC
Gate-Source Charge	Q _{gs}			7.3		
Gate-Drain Charge	Q _{gd}			7.2		
Turn-On Delay Time	t _{d(on)}	V _{DD} = 75V, V _{GS} = 10V, I _D = 35A, R _G = 3Ω		13		ns
Turn-On Rise Time	t _r			4		
Turn-Off Delay Time	t _{d(off)}			16		
Turn-Off Fall Time	t _f			3		
Source-Drain Diode Characteristics						
Diode Forward Voltage ⁴	V _{SD}	V _{GS} = 0V, I _S = 20A			1.2	V
Diode Continuous Forward Current ¹	I _S	T _C = 25°C			83	A
Diode Pulse Forward Current ²	I _{SM}				332	A
Diode Reverse Recovery Time	t _{rr}	I _F = 60A, dI/dt = 100A/μs		85		ns
Diode Reverse Recovery Charge	Q _{rr}			450		nC







Notes:


- 1.The maximum current rating is limited by package. And device mounted on a large heatsink.
- 2.Pulse Test: Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.EAS condition: V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_G = 25Ω Starting T_J = 25°C.
- 4.Pulse Test: Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 5.The power dissipation P_D is limited by T_{J(MAX)} = 150°C. And device mounted on a large heatsink.
- 6.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A = 25°C.

Typical Characteristics

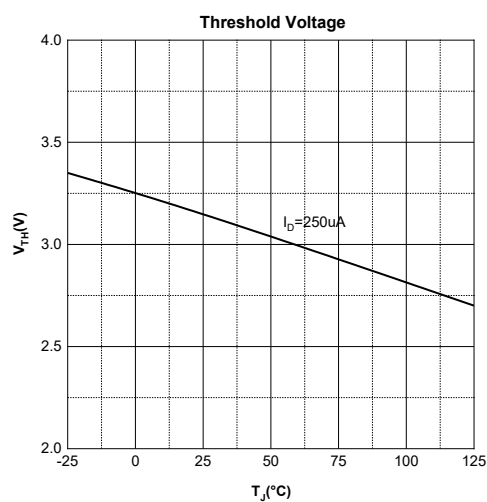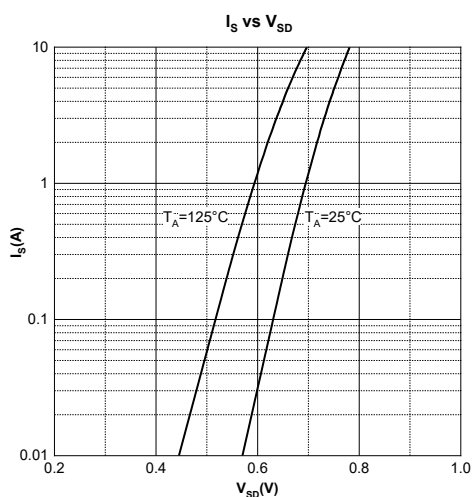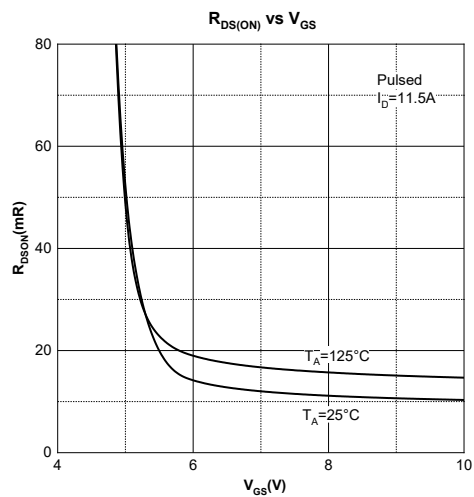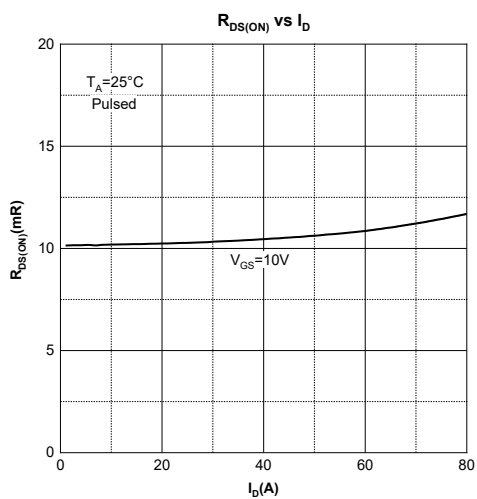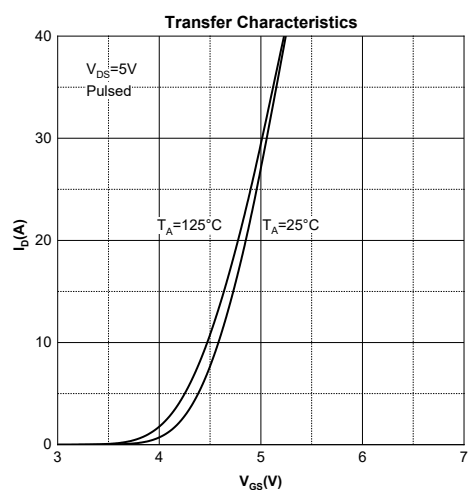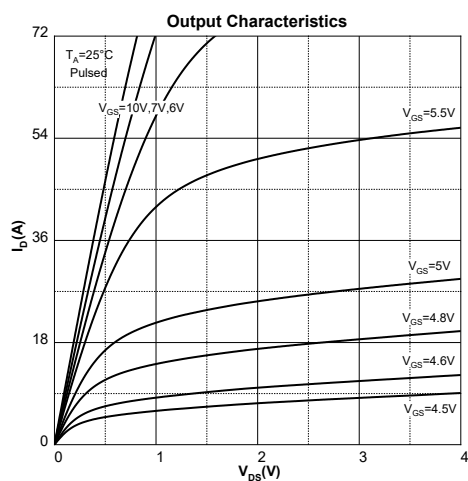

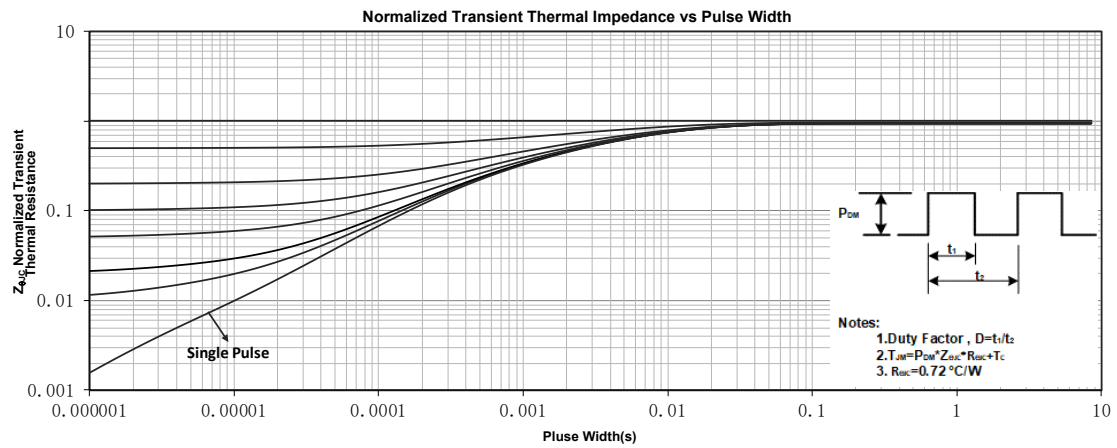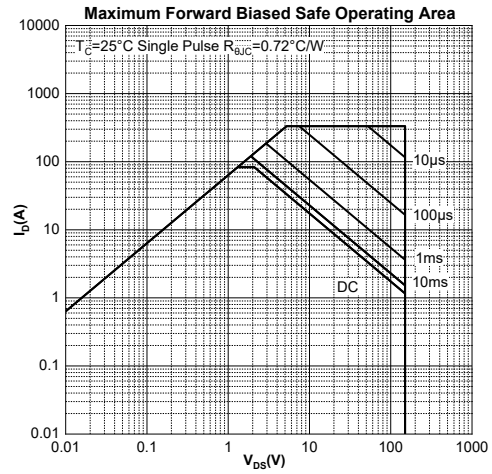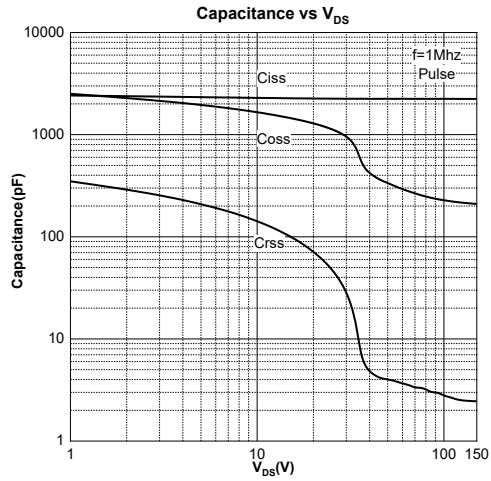

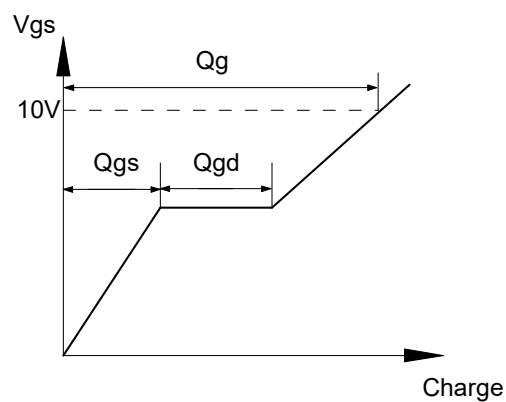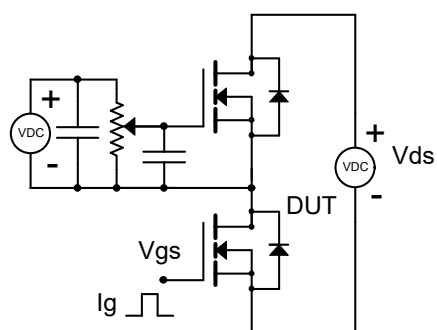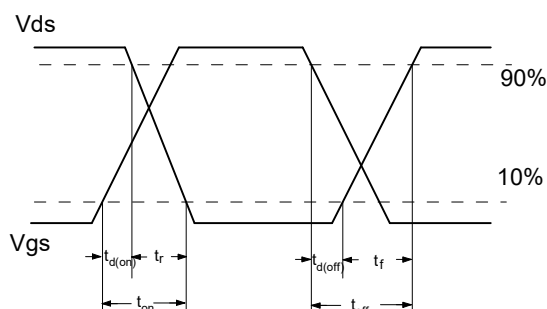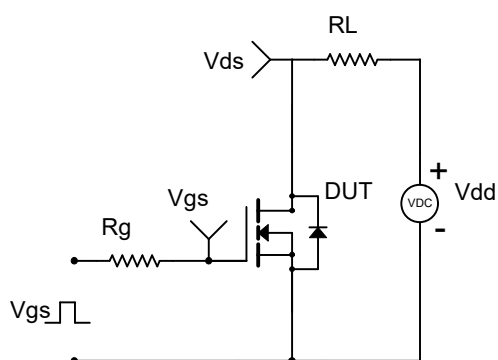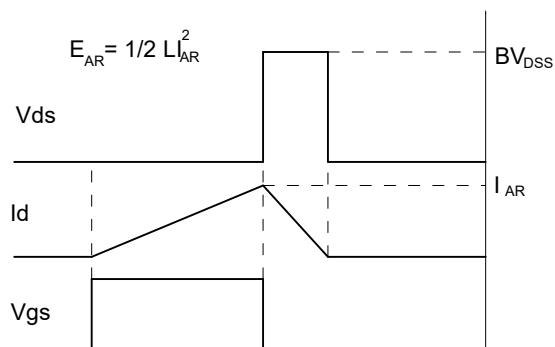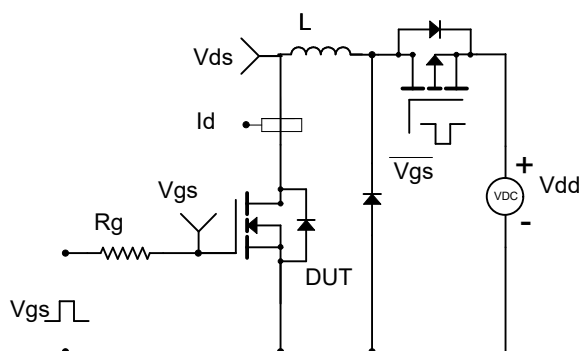Gate Charge Test Circuit & Waveform

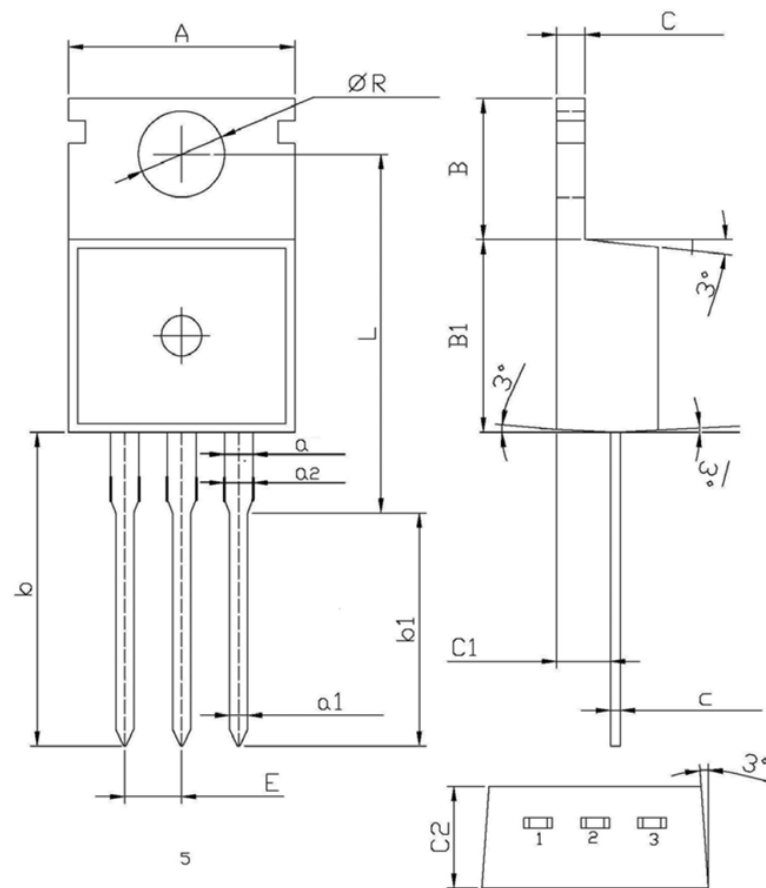Resistive Switching Test Circuit & Waveform

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms


TO-220-3L-C Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	9.800	10.200	0.386	0.402
R	3.560	3.640	0.140	0.143
L	15.700	16.100	0.618	0.634
b	12.600	13.600	0.496	0.535
b1	9.600	10.600	0.378	0.417
a	1.220	1.320	0.048	0.052
E	2.340	2.740	0.092	0.108
a2	1.250	1.620	0.049	0.064
C	1.200	1.400	0.047	0.055
B	5.900	6.700	0.232	0.264
B1	9.000	9.400	0.354	0.370
C1	2.200	2.600	0.087	0.102
a1	0.700	0.900	0.028	0.035
c	0.400	0.600	0.016	0.024
C2	4.300	4.700	0.169	0.185

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.