

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-30V	50mΩ@-10V	-5.1A
	60mΩ@-6V	
	70mΩ@-4.5V	


Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge


Application

- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch


MARKING:



SOP8



Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	-30	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current ^{1,5}	$T_A = 25^\circ\text{C}$	I_D	-5.1	A
	$T_A = 100^\circ\text{C}$		-3.2	
Pulsed Drain Current ²		I_{DM}	-20	A
Power Dissipation ^{4,5}		P_D	2.5	W
Thermal Resistance from Junction to Ambient ⁵		$R_{\theta JA}$	50	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)




Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -30V, V _{GS} = 0V			-1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
On Characteristics ³						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1.0	-1.5	-2.0	V
Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = -10V, I _D = -5.1A		50	65	mΩ
		V _{GS} = -6.0V, I _D = -4.1A		60	80	
		V _{GS} = -4.5V, I _D = -2.0A		70	100	
Dynamic Characteristics ⁴						
Input Capacitance	C _{iss}	V _{DS} = -15V, V _{GS} = 0V, f = 1MHz		287		pF
Output Capacitance	C _{oss}			32		
Reverse Transfer Capacitance	C _{rss}			30		
Gate Resistance	R _g	V _{DS} = 0V, V _{GS} = 0V, f = 1MHz		38		Ω
Switching Characteristics ⁴						
Total Gate Charge	Q _g	V _{DS} = -15V, V _{GS} = -10V, I _D = -5.1A		7		nC
Gate-Source Charge	Q _{gs}			0.97		
Gate-Drain Charge	Q _{gd}			1.6		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -15V, V _{GS} = -10V, R _L = 15Ω, R _G = 6Ω		30		ns
Turn-On Rise Time	t _r			60		
Turn-Off Delay Time	t _{d(off)}			120		
Turn-Off Fall Time	t _f			100		
Source-Drain Diode Characteristics						
Diode Forward Voltage ³	V _{SD}	V _{GS} = 0V, I _S = -2.6A			-1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.Pulse Test : Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 4.The power dissipation P_D is limited by T_{J(MAX)} = 150°C.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A = 25°C.

Typical Characteristics

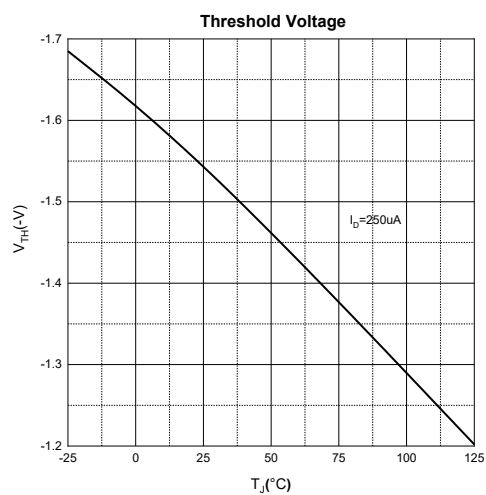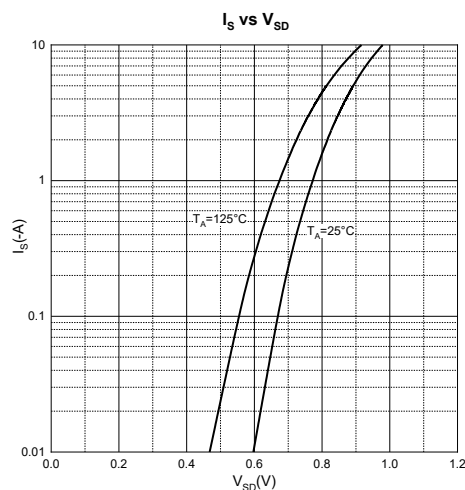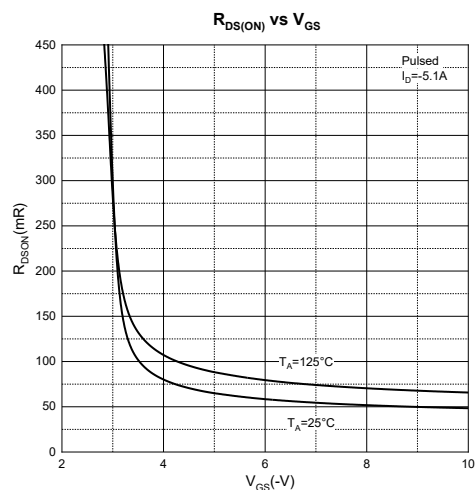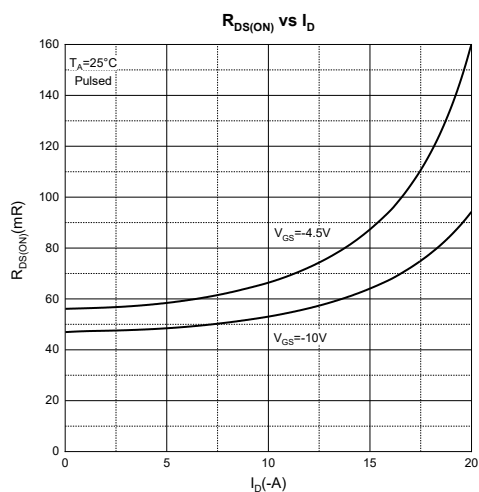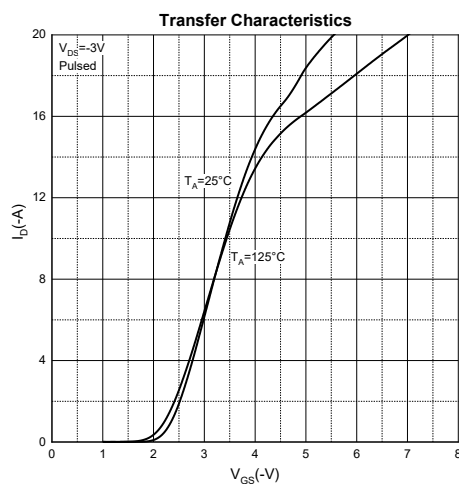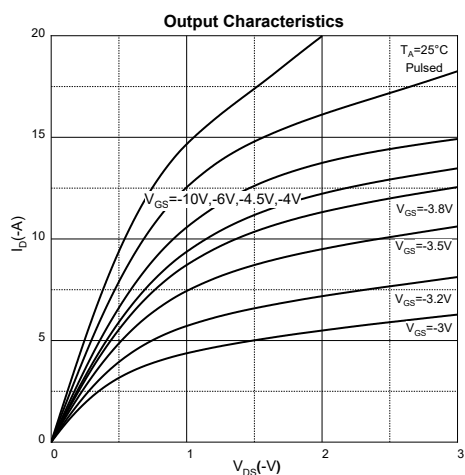

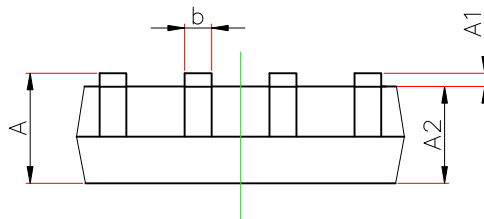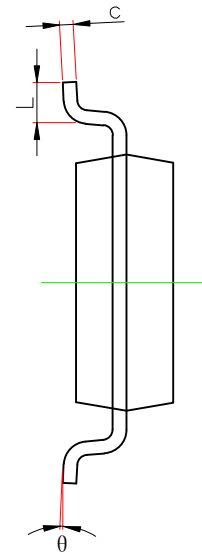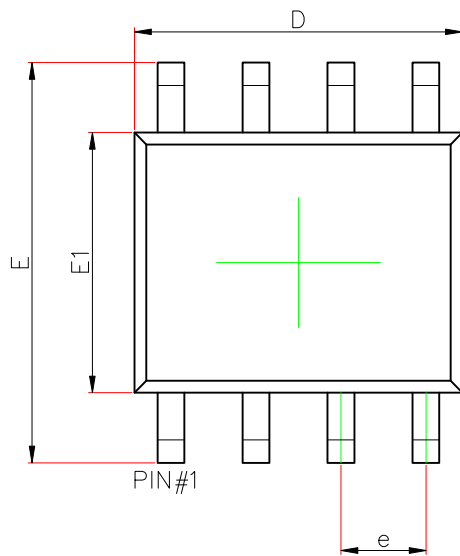SOP8 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.156	0.250	0.006	0.010
D	4.700	5.100	0.185	0.201
e	1.270(BSC)		0.050(BSC)	
E	5.800	6.200	0.228	0.244
E1	3.700	4.100	0.146	0.161
L	0.400	1.270	0.016	0.05
θ	0°	8°	0°	8°

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.