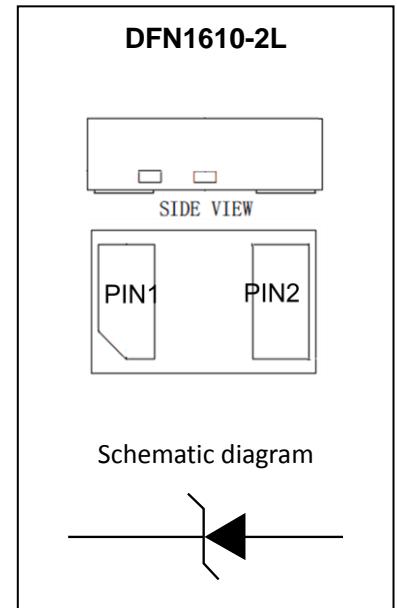


Product Summary

The GESDS7V0FA1P is designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in digital cameras, cellular phones, MP3 players and many other portable applications where board space is at a premium.

Feature

- Low reverse stand-off voltage: 7V
- 80A Peak pulse current per line ($t_p = 8/20\mu s$)
- Low clamping voltage
- Unidirectional configurations
- Response time is typically <1ns
- Protect one power line
- IEC61000-4-2(ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)



Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Portable Instrumentation
- Digital Cameras
- Other electronics equipments communication systems

Marking: 07P

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

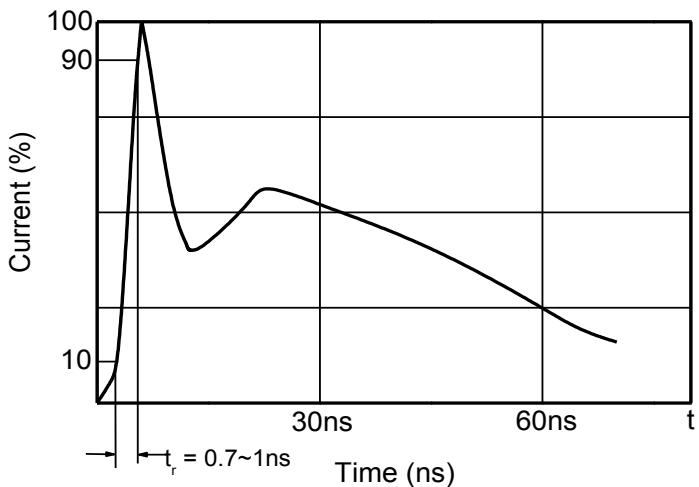
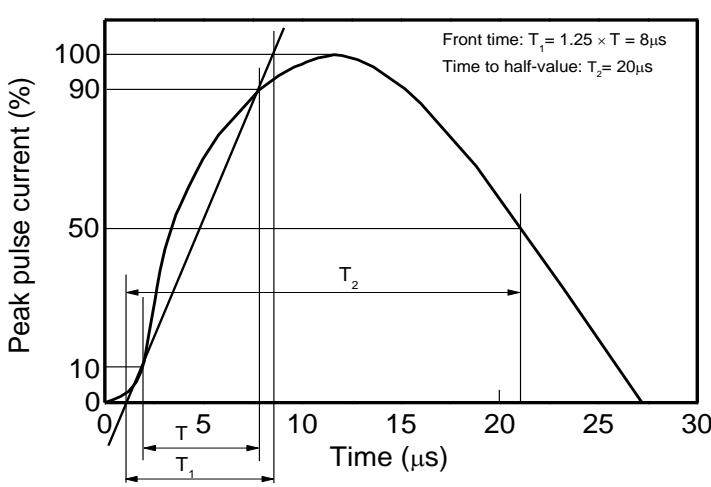
Parameter	Symbol	Value	Unit
IEC 61000-4-2 ESD Voltage	V_{ESD}	± 30	KV
IEC 61000-4-2 ESD Voltage		± 30	
JESD22-A114-B ESD Voltage		± 16	
ESD Voltage		± 0.4	
Peak Pulse Power	P_{PP}	1600	W
Peak Pulse Current	I_{PP}	80	A
Lead Solder Temperature – Maximum (10 Second Duration)	T_L	260	$^\circ\text{C}$
Junction Temperature	T_J	-55~+125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55~+150	$^\circ\text{C}$

ESD standards compliance
IEC61000-4-2 Standard

Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

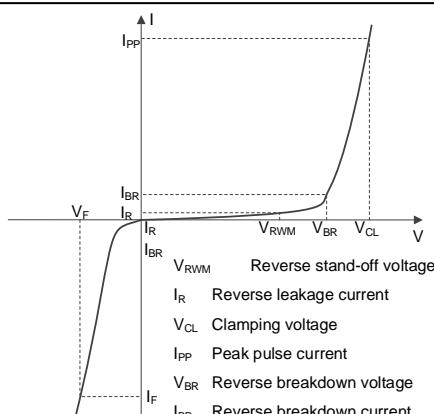
JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

Contact discharge current waveform per IEC61000-4-2

8/20μs waveform per IEC61000-4-5


Electrical Parameter

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage

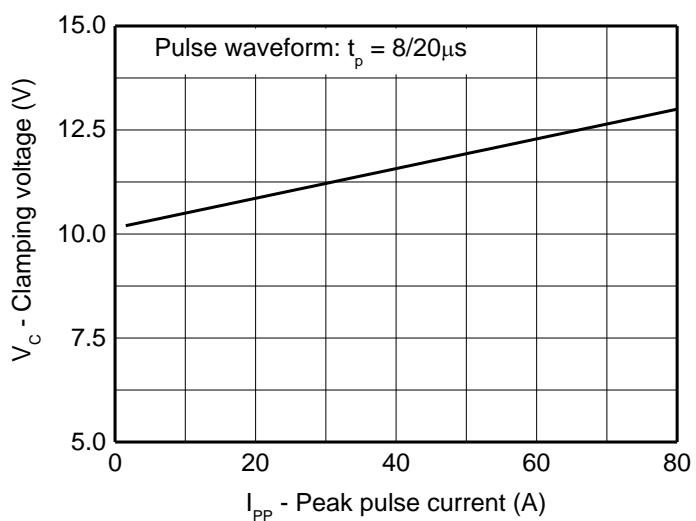
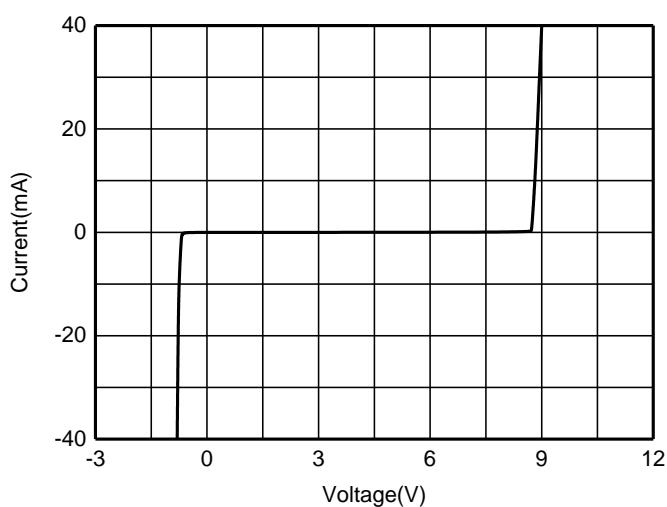
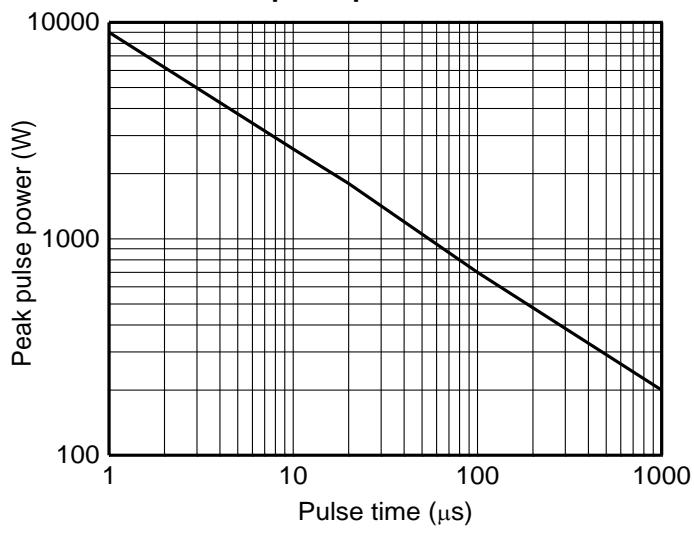
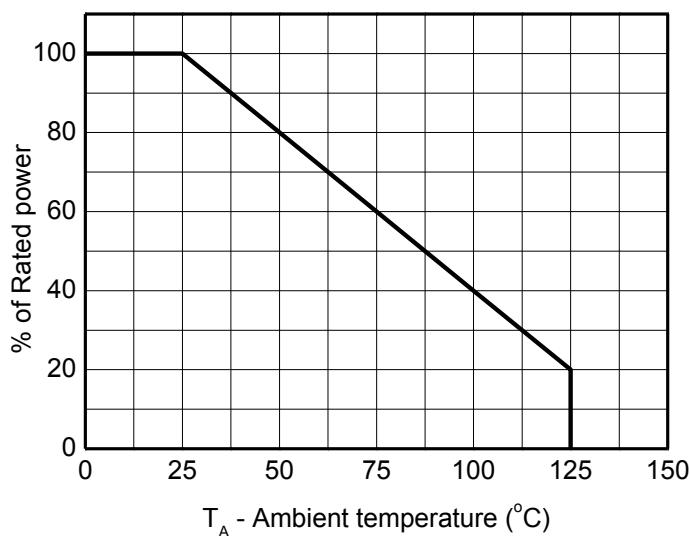


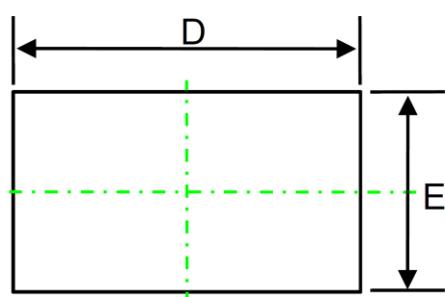
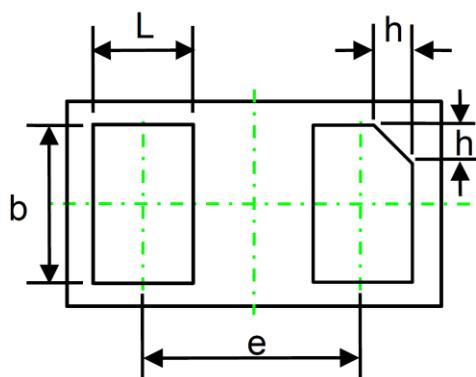
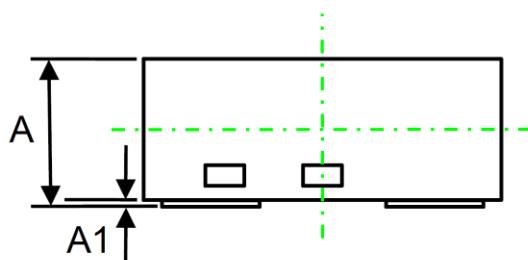
V-I characteristics for a Uni-directional TVS

Electrical Characteristics ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand-off voltage	$V_{RWM}^1)$				7	V
Reverse leakage current	I_R	$V_{RWM}=7\text{V}$			1	uA
Breakdown voltage	V_{BR}	$I_T=1\text{mA}$	8			V
Clamping voltage	$V_C^2)$	$I_{PP}=80\text{A}$			15	V
Junction capacitance	C_J	$V_R=0\text{V}, f=1\text{MHz}$		810	1100	pF

- 1) Other voltages available upon request.
- 2) Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5

Typical Characteristics
V_C vs. I_{PP}

I-V Curve

Peak pulse power vs. Pulse time

Power derating vs. Ambient temperature


DFN1610-2L Package Outline Dimensions

Top View

Bottom View

Side View

	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.45	0.50	0.55
A1	-	0.02	0.05
b	0.75	0.80	0.85
c	0.10	0.15	0.20
D	1.55	1.60	1.65
e	1.10BSC		
E	0.95	1.00	1.05
L	0.35	0.40	0.45
h	0.15	0.20	0.25
载体尺寸(Mil)	34*35		