

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
30V	12mΩ@10V	6.9A
	14mΩ@4.5V	
	24mΩ@2.5V	



Feature

- High cell density trench N-ch MOSFETs
- Super low gate charge
- Advanced high cell density Trench technology

Application

- Battery protection applications
- Load switch

MARKING:

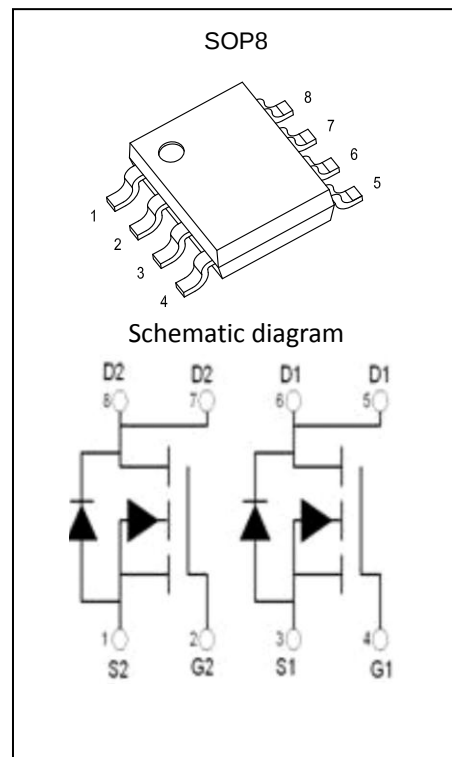

ABSOLUTE MAXIMUM RATINGS ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	6.9	A
Pulsed Drain Current	I_{DM}	28	A
Power Dissipation	P_D	1.25	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	100	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^{\circ}\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS (T_J=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V,V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±12V, V _{DS} = 0V			±0.1	μA
Gate threshold voltage ¹	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.7	1.1	1.4	V
Drain-source on-resistance ¹	R _{DS(on)}	V _{GS} =10V, I _D =6.9A		12	21	mΩ
		V _{GS} =4.5V, I _D =6A		14	25	
		V _{GS} =2.5V, I _D =5A		24	40	
Forward tranconductance ¹	g _{FS}	V _{DS} =5V, I _D =5A	8	12		S
Dynamic characteristics ²						
Input Capacitance	C _{iss}	V _{DS} =15V,V _{GS} =0V,f =1MHz			1155	pF
Output Capacitance	C _{oss}			108		
Reverse Transfer Capacitance	C _{rss}			84		
Gate resistance	R _g	V _{DS} =0V,V _{GS} =0V, f =1MHz			3.6	Ω
Switching Characteristics ²						
Turn-on delay time	t _{d(on)}	V _{GS} =10V,V _{DS} =15V, R _L =2.7Ω,R _{GEN} =3Ω			5	ns
Turn-on rise time	t _r				7	
Turn-off delay time	t _{d(off)}				40	
Turn-off fall time	t _f				6	
Source-Drain Diode characteristics						
Diode Forward voltage ¹	V _{SD}	V _{GS} =0V, I _S =1A			1	V




Notes:

1. Pulse Test : Pulse Width≤300μs, duty cycle ≤2%.
2. Guaranteed by design, not subject to production testing.

Typical Electrical and Thermal Characteristics

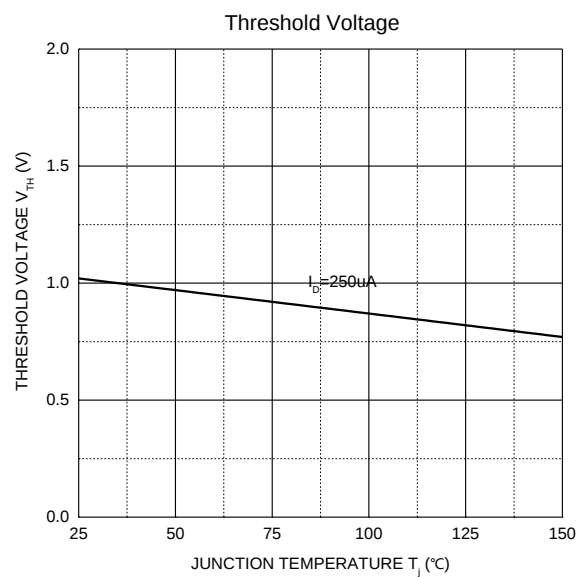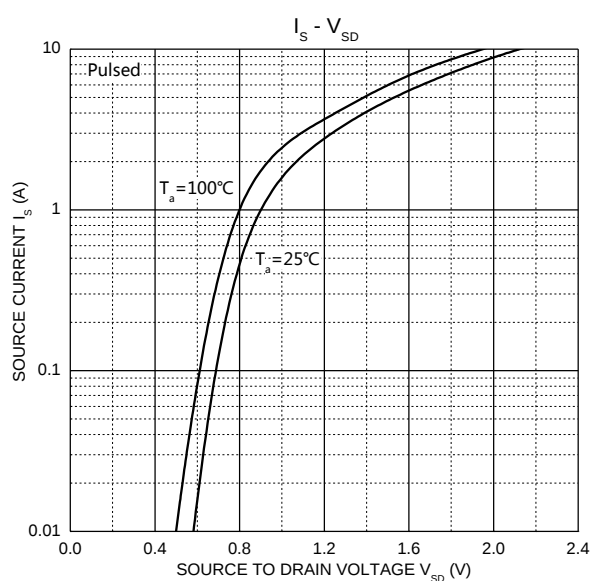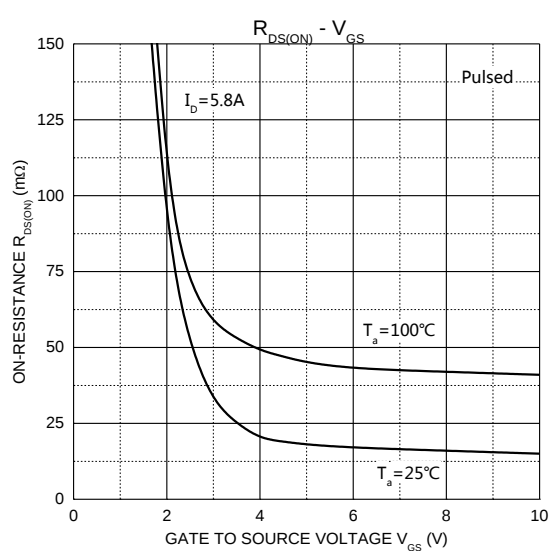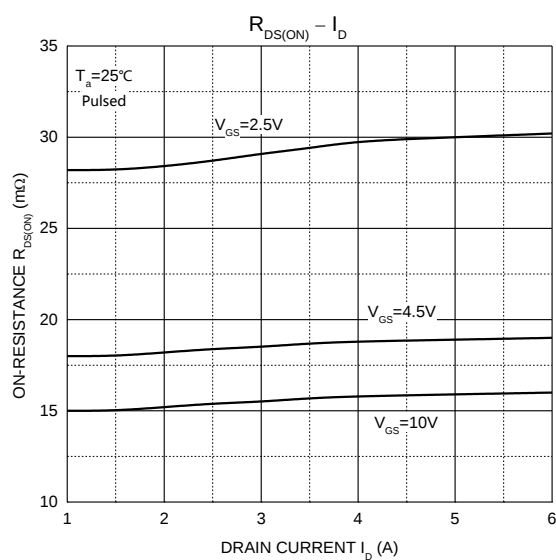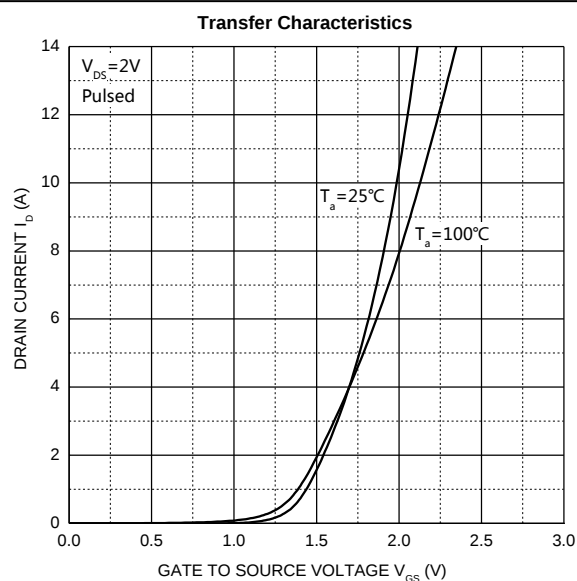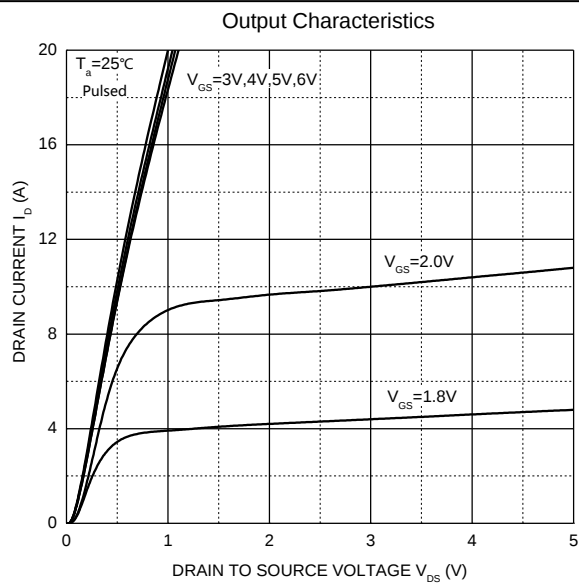


SOP8 Package Information

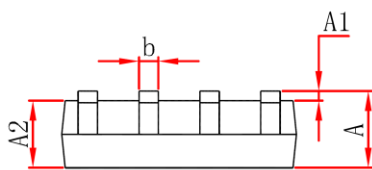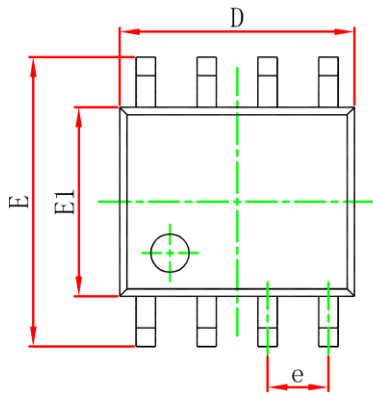

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.800	5.000	0.189	0.197
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°


SOP8 Tape and Reel

SOP8 Embossed Carrier Tape

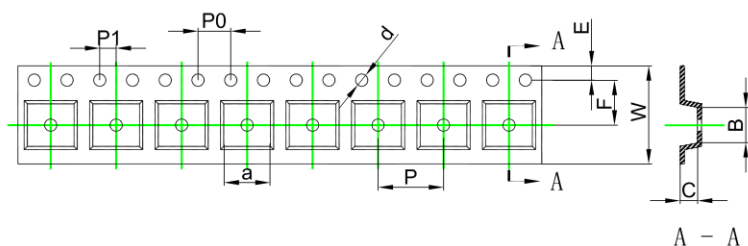


Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
SOP8	6.40	5.40	2.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

SOP8 Tape Leader and Trailer

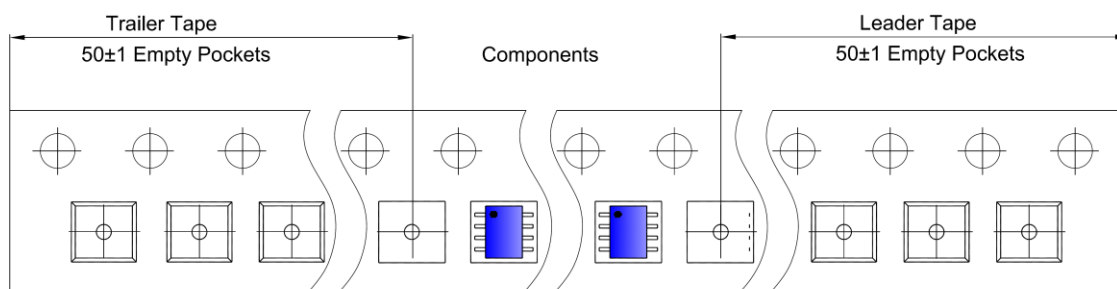

SOP8 Reel

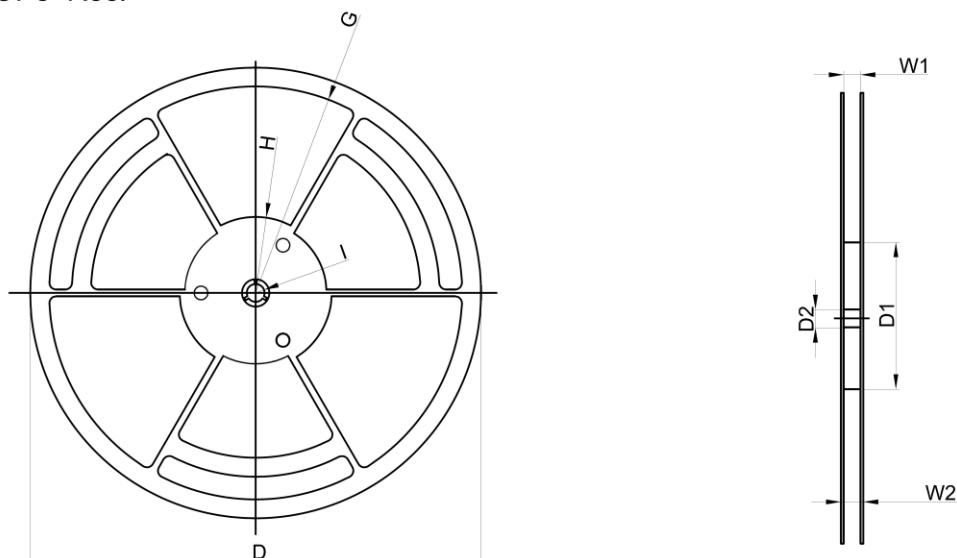

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
13" Dia	Ø330.00	100.00	13.00	R151.00	R56.00	R6.50	12.40	17.60

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
4,000 pcs	13 inch	8,000 pcs	360×360×65	64,000 pcs	565×380×390	