



GP
ELECTRONICS

GP2302CA
20V N-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
20V	37mΩ@4.5V	3 A
	51mΩ@2.5V	



Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge

Application

- Load Switch
- DC/DC Converter

MARKING:

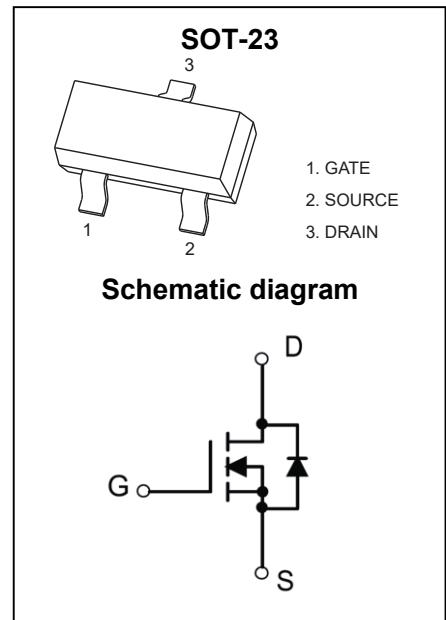

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	20	V
Gate - Source Voltage	V_{GS}	± 10	V
Continuous Drain Current ^{1,5}	I_D	3	A
Pulsed Drain Current ²	I_{DM}	12	A
Power Dissipation ^{4,5}	P_D	0.78	W
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	160	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C







MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	20			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{\text{GS}} = \pm 10\text{V}, V_{\text{DS}} = 0\text{V}$			± 100	nA
On Characteristics³						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	0.4	0.7	1.1	V
Drain-source On-resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 4.5\text{V}, I_D = 2\text{A}$		37	48	$\text{m}\Omega$
		$V_{\text{GS}} = 2.5\text{V}, I_D = 1\text{A}$		51	66	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 10\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		182.2		pF
Output Capacitance	C_{oss}			35.7		
Reverse Transfer Capacitance	C_{rss}			34.0		
Gate Resistance	R_g	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		4.3		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 4.5\text{V}, I_D = 2\text{A}$		3.28		nC
Gate-source Charge	Q_{gs}			0.03		
Gate-drain Charge	Q_{gd}			0.70		
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 10\text{V}, V_{\text{GS}} = 4.5\text{V}, R_L = 1.5\Omega, R_G = 3\Omega$		6.8		ns
Turn-on Rise Time	t_r			57		
Turn-off Delay Time	$t_{\text{d}(\text{off})}$			14		
Turn-off Fall Time	t_f			53		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_s = 0.94\text{A}$			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu\text{s}$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(\text{MAX})} = 150^\circ\text{C}$.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

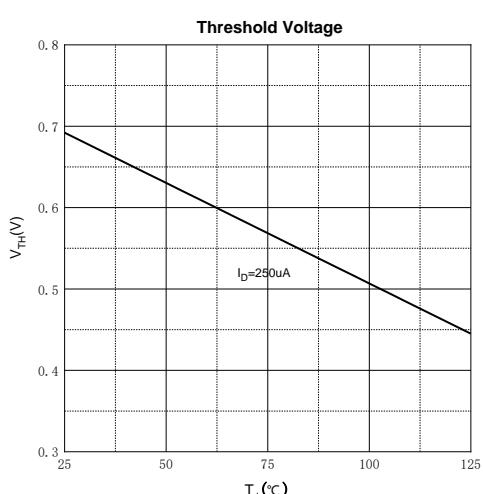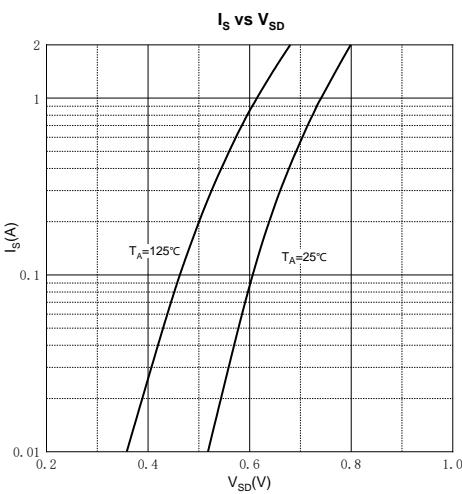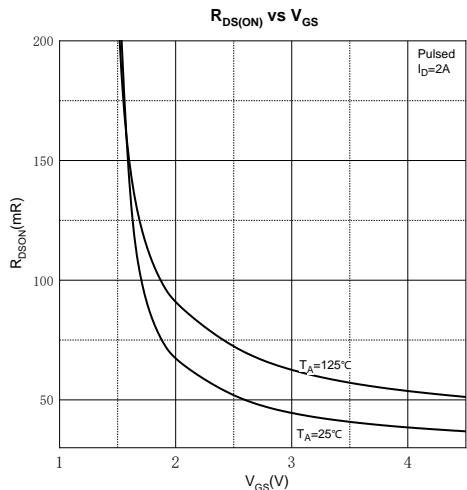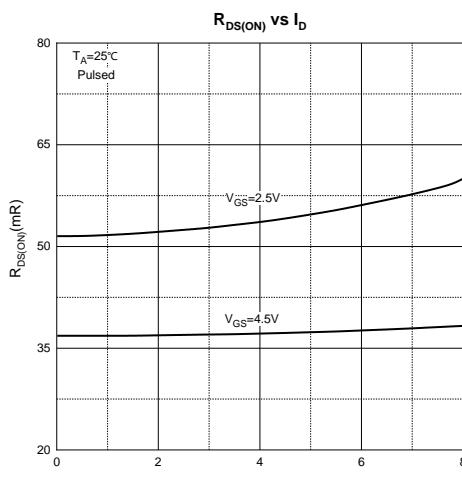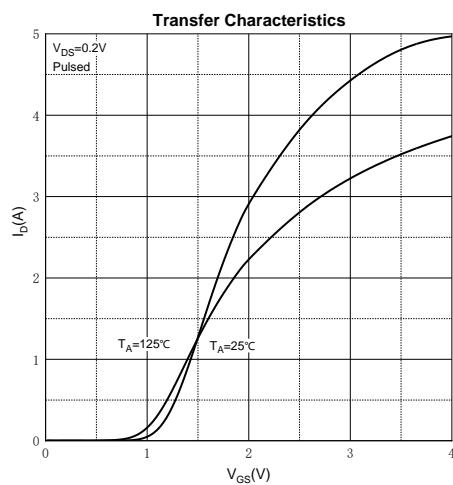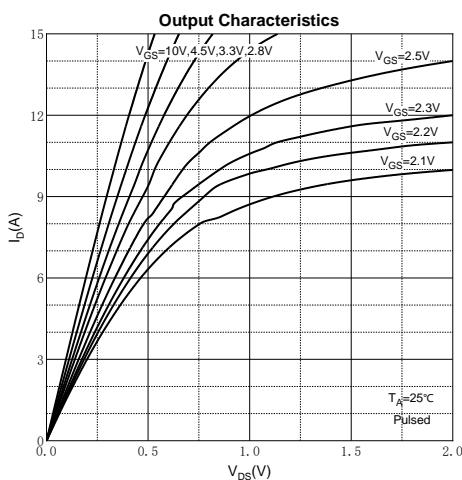

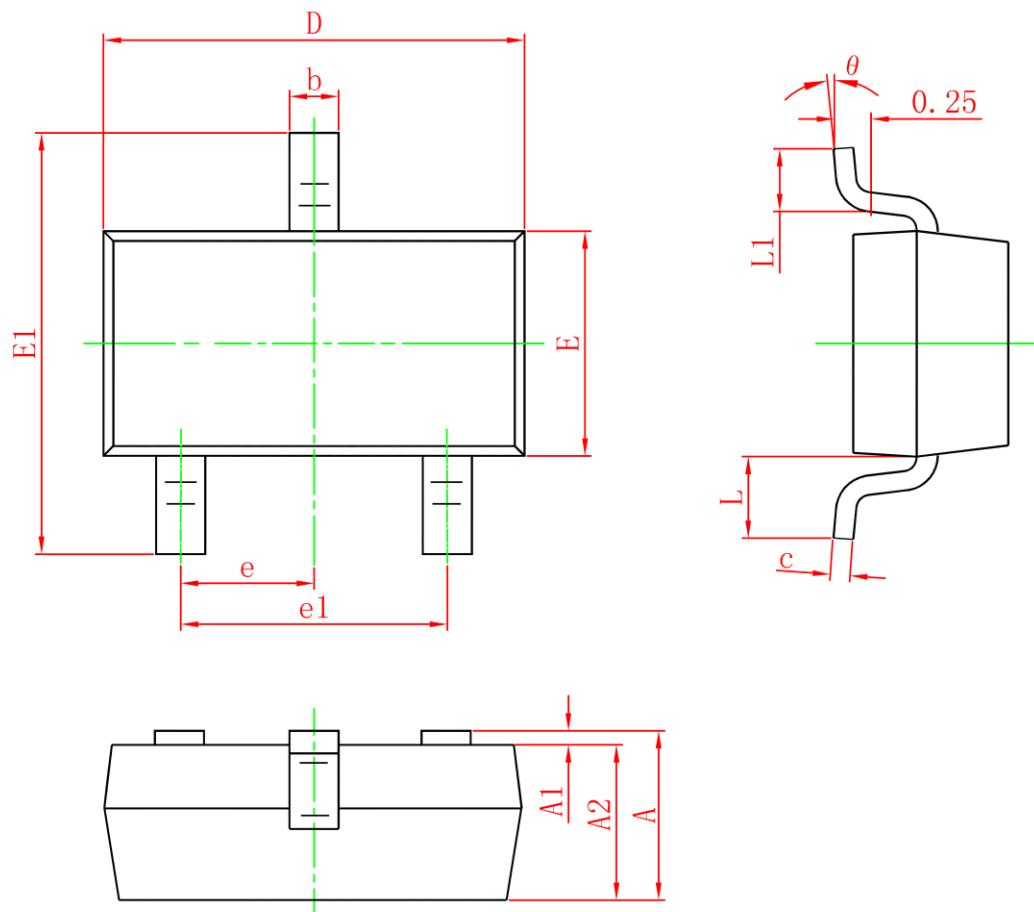SOT-23 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0	0.100	0	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.150	1.500	0.045	0.059
E1	2.250	2.650	0.089	0.104
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°