

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
85V	7.8mΩ@10V	80A


Feature

- Split Gate Trench Technology
- Low $R_{DS(on)}$
- Low Gate Charge
- Low Gate Resistance
- 100% UIS Tested

Application

- Power Switching Application

MARKING:




T070NE8N = Device Code
XX = Date Code
Solid Dot = Green Indicator

TO-220-3L-C

1. GATE
2. DRAIN
3. SOURCE

Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain - Source Voltage		V_{DS}	85	V
Gate - Source Voltage		V_{GS}	±20	V
Continuous Drain Current ¹	$T_C = 25^\circ\text{C}$	I_D	80	A
	$T_C = 100^\circ\text{C}$	I_D	52	A
Pulsed Drain Current ²		I_{DM}	320	A
Single Pulsed Avalanche Current ³		I_{AS}	24	A
Single Pulsed Avalanche Energy ³		E_{AS}	144	mJ
Power Dissipation ⁵		P_D	78	W
		$T_C = 25^\circ\text{C}$		
Thermal Resistance from Junction to Ambient ⁶		$R_{\theta JA}$	60	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case		$R_{\theta JC}$	1.6	$^\circ\text{C/W}$
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)




Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	85			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 68V, V_{GS} = 0V$			1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics ⁴						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.0	4.0	V
Drain-source On-resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 10A$		7.8	10	m Ω
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 45V, V_{GS} = 0V, f = 1MHz$		1642		pF
Output Capacitance	C_{oss}			419		
Reverse Transfer Capacitance	C_{rss}			14		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		2.5		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = 45V, V_{GS} = 10V, I_D = 10A$		27		nC
Gate-source Charge	Q_{gs}			7.1		
Gate-drain Charge	Q_{gd}			7.3		
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = 40V, V_{GS} = 10V, I_D = 37.5A, R_G = 10\Omega$		11		ns
Turn-on Rise Time	t_r			9		
Turn-off Delay Time	$t_{d(off)}$			27		
Turn-off Fall Time	t_f			7		
Source - Drain Diode Characteristics						
Diode Forward Voltage ⁴	V_{SD}	$V_{GS} = 0V, I_S = 10A$			1.2	V


Notes :

- 1.The maximum current rating is limited by package.And device mounted on a large heatsink
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.EAS condition: $V_{DD} = 40V, V_{GS} = 10V, L = 0.5mH, R_G = 25\Omega$ Starting $T_J = 25^\circ\text{C}$.
- 4.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 5.The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$.And device mounted on a large heatsink
- 6.Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

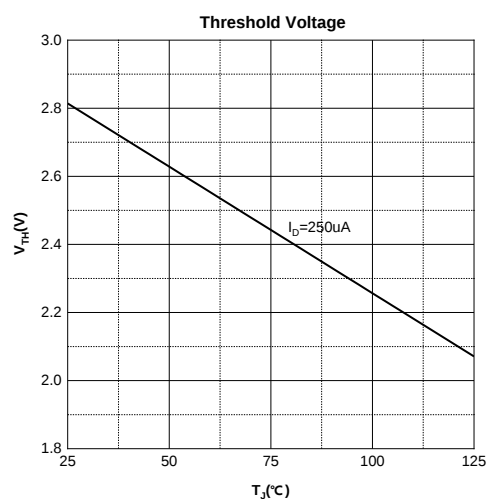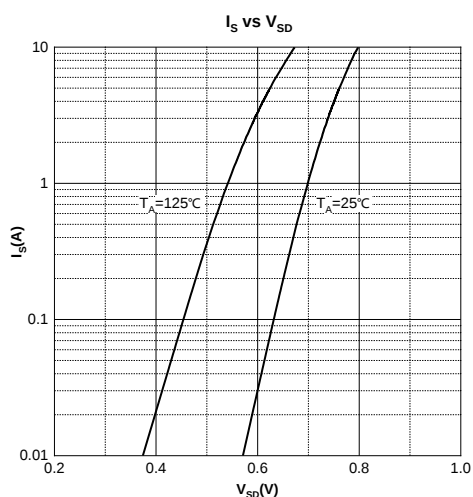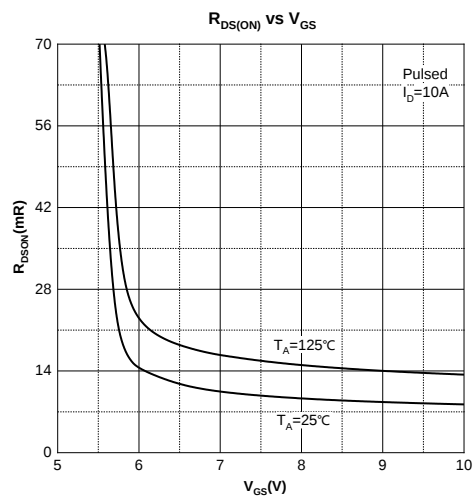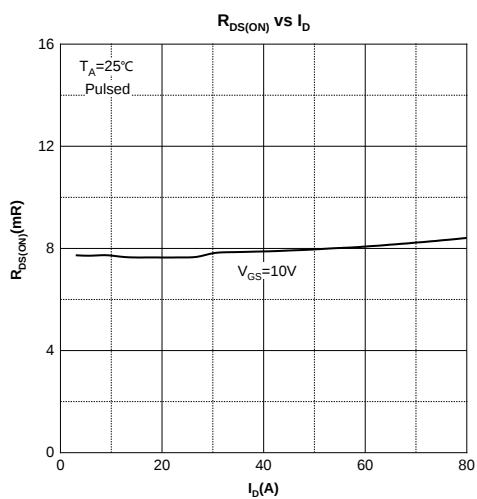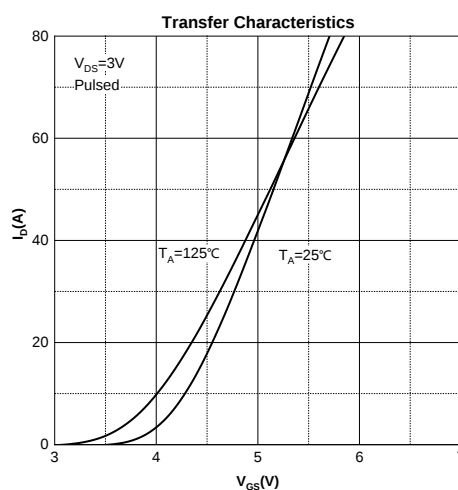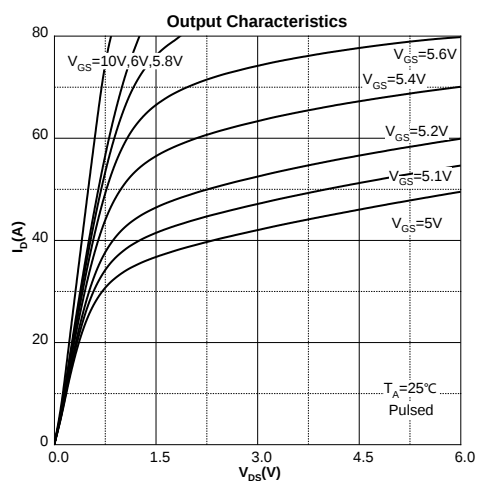

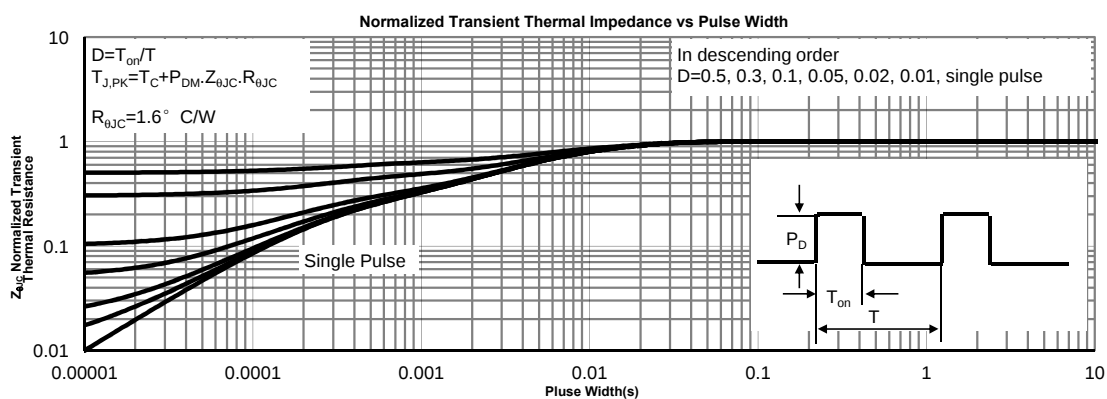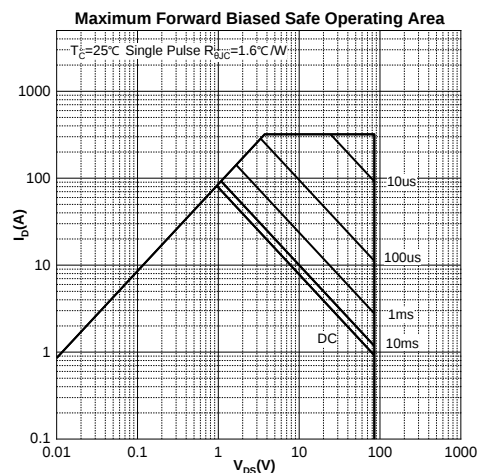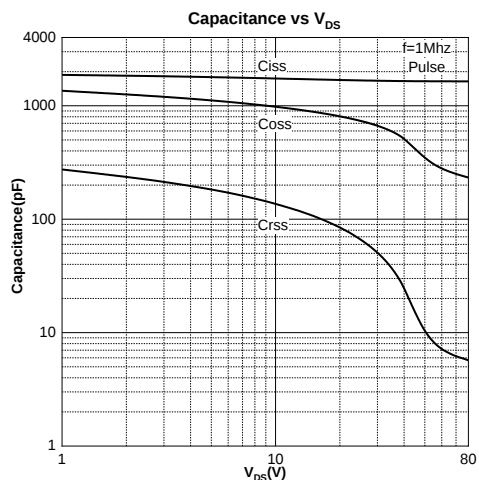

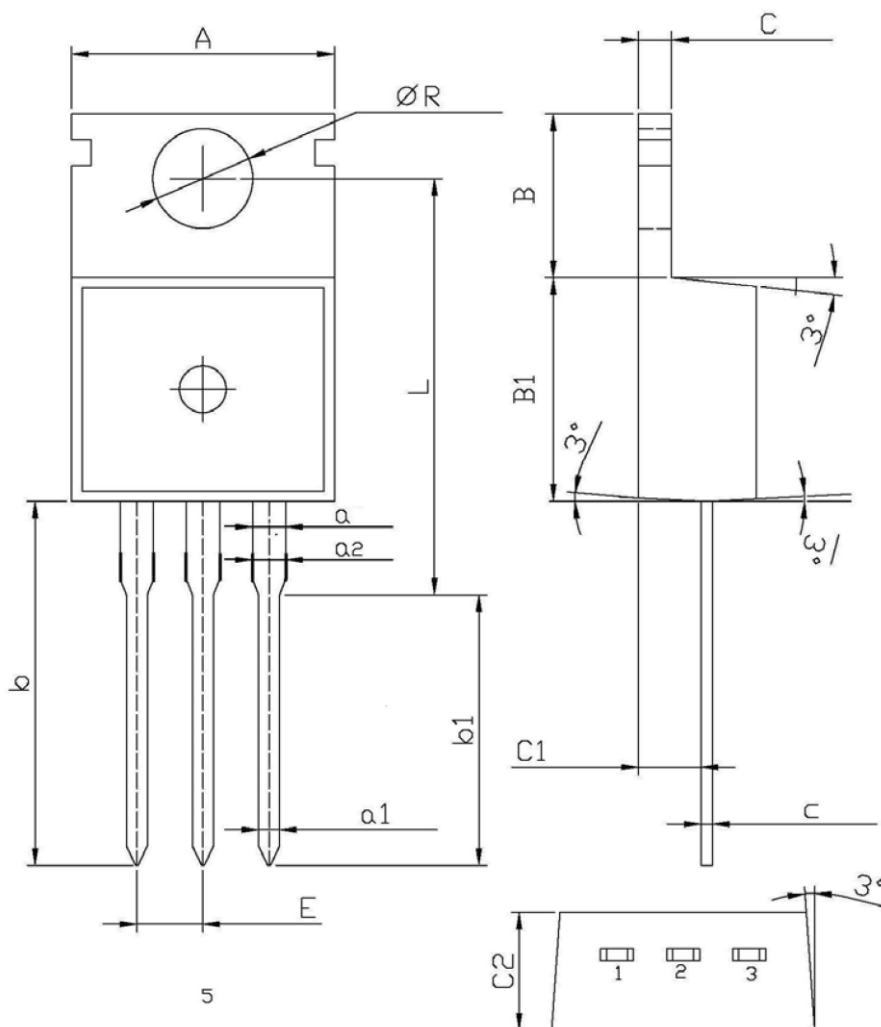TO-220-3L-C Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	9.800	10.200	0.386	0.402
R	3.560	3.640	0.140	0.143
L	15.700	16.100	0.618	0.634
b	12.600	13.600	0.496	0.535
b1	9.600	10.600	0.378	0.417
a	1.220	1.320	0.048	0.052
E	2.340	2.740	0.092	0.108
a2	1.250	1.450	0.049	0.057
C	1.200	1.400	0.047	0.055
B	6.300	6.700	0.248	0.264
B1	9.000	9.400	0.354	0.370
C1	2.200	2.600	0.087	0.102
a1	0.700	0.900	0.028	0.035
c	0.400	0.600	0.016	0.024
C2	4.300	4.700	0.169	0.185