

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
30V	23m Ω @10V	5A
	25m Ω @4.5V	
	31m Ω @2.5V	

Feature

- Trench Technology Power MOSFET
- Low $R_{DS(on)}$
- Low Gate Charge
- ESD Protect


Application

- Load Switch
- DC/DC Converter


MARKING:



DFN2X2-6L



Schematic diagram



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	± 10	V
Continuous Drain Current ^{1,5}	$T_A = 25^\circ\text{C}$	I_D	5	A
	$T_A = 100^\circ\text{C}$		3	
Pulsed Drain Current ²		I_{DM}	20	A
Power Dissipation ^{4,5}		P_D	1.5	W
$T_A = 25^\circ\text{C}$				
Thermal Resistance from Junction to Ambient ⁵		$R_{\theta JA}$	83	$^\circ\text{C/W}$
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 10V, V_{DS} = 0V$			± 5	μA
On Characteristics ³						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	0.4	0.8	1.0	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 5A$		22	29	m Ω
		$V_{GS} = 4.5V, I_D = 5A$		25	33	
		$V_{GS} = 2.5V, I_D = 4A$		31	50	
Forward Transconductance	g_{FS}	$V_{DS} = 5V, I_D = 4A$		11		S
Dynamic Characteristics ⁴						
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 1MHz$		612		pF
Output Capacitance	C_{oss}			51		
Reverse Transfer Capacitance	C_{rss}			44		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		1.7		Ω
Switching Characteristics ⁴						
Total Gate Charge	Q_g	$V_{DS} = 15V, V_{GS} = 10V, I_D = 5A$		20		nC
Gate-Source Charge	Q_{gs}			1.4		
Gate-Drain Charge	Q_{gd}			2.9		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 15V, V_{GS} = 10V, I_D = 10A,$ $R_G = 3\Omega$		6		ns
Turn-On Rise Time	t_r			41		
Turn-Off Delay Time	$t_{d(off)}$			19		
Turn-Off Fall Time	t_f			83		
Source-Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = 1A$			1.2	V

Notes :


- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$.
- 5.Device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

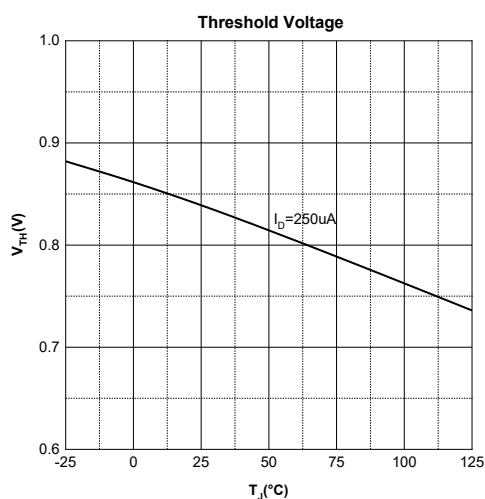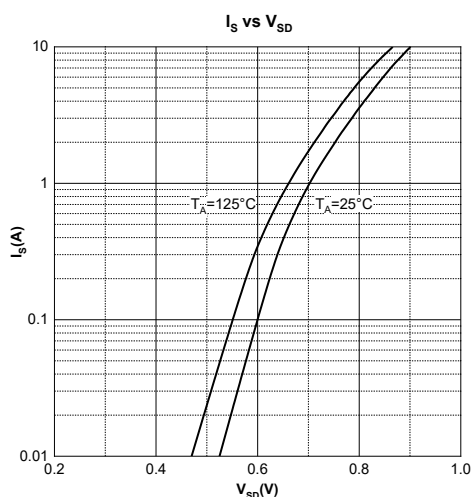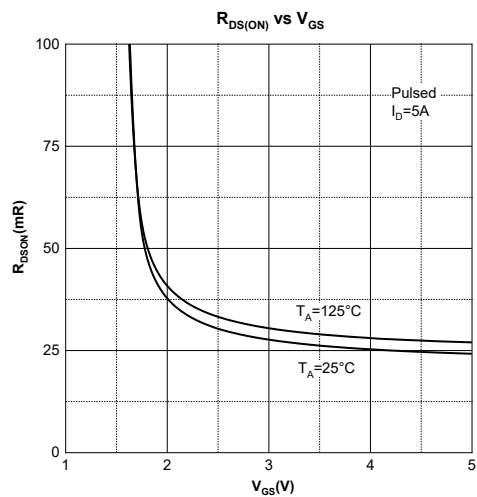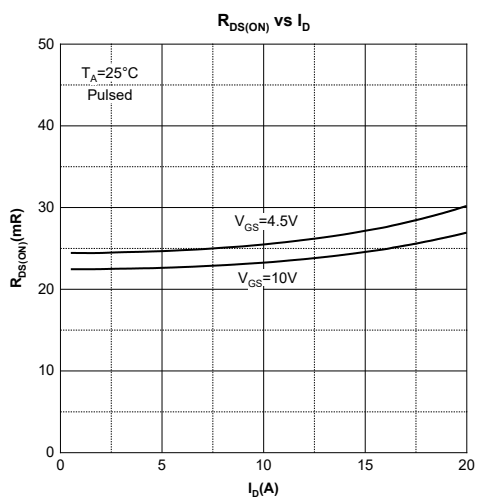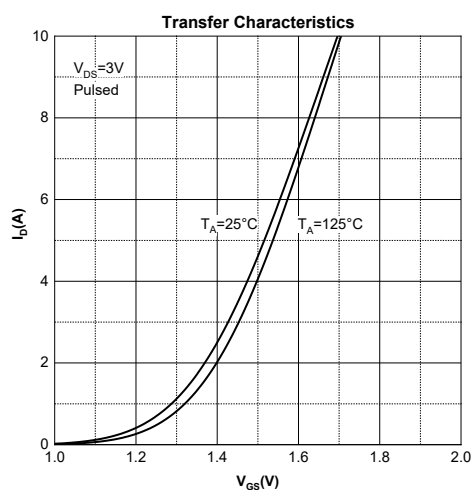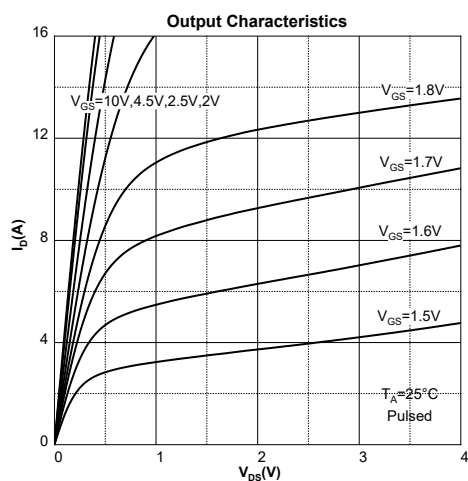


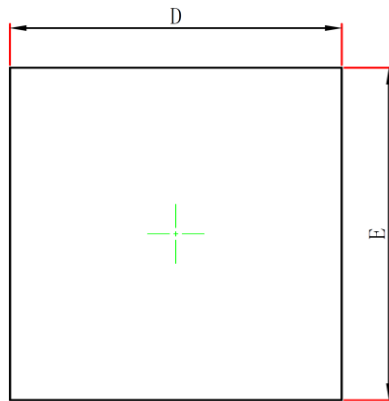DFN2X2-6L Package Information


TOP VIEW

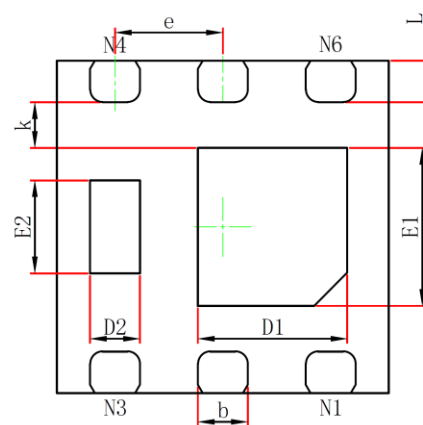

BOTTOM VIEW

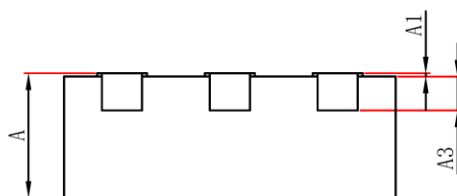

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0	0.050	0	0.002
A3	2.03REF		0.008REF	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN		0.008MIN	
b	0.250	0.350	0.010	0.014
e	0.65BSC		0.026TYP	
L	0.174	0.326	0.007	0.013

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.