

Product Summary



$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
40V	5.3m Ω @10V	80A
	9.5m Ω @4.5V	

Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge
- Low Gate Resistance
- 100% UIS Tested

Application

- Load Switch
- PWM Application
- Power Management

TO-252-2L

Schematic diagram

Package Marking and Ordering Information

Part Number	Package	Marking	Packing	Reel Size	Tape Width	Qty
GPM065N04NTF	TO-252-2L	M065N04N	Reel & Tape	330mm	12mm	2500pcs

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain-Source Voltage		V_{DS}	40	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current ¹	$T_C = 25^\circ\text{C}$	I_D	80	A
	$T_C = 100^\circ\text{C}$		51	
Pulsed Drain Current ²		I_{DM}	320	A
Single Pulsed Avalanche Current ³		I_{AS}	23	A
Single Pulsed Avalanche Energy ³		E_{AS}	132	mJ
Power Dissipation ⁵		P_D	46	W
$T_C = 25^\circ\text{C}$				
Thermal Resistance from Junction to Ambient ⁶		$R_{\theta JA}$	35	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case		$R_{\theta JC}$	2.7	$^\circ\text{C/W}$
Junction Temperature		T_J	150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55~ +150	$^\circ\text{C}$







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)






Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	40			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 40V, V_{GS} = 0V$			1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics ⁴						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1	2	3	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 4A$		5.3	7.0	m Ω
		$V_{GS} = 4.5V, I_D = 4A$		9.5	12.0	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 20V, V_{GS} = 0V, f = 1MHz$		1739		pF
Output Capacitance	C_{oss}			174		
Reverse Transfer Capacitance	C_{rss}			144		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$		2.4		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = 15V, V_{GS} = 10V, I_D = 4A$		39		nC
Gate-Source Charge	Q_{gs}			6.1		
Gate-Drain Charge	Q_{gd}			9.3		
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 20V, V_{GS} = 10V, R_G = 3\Omega, I_D = 30A$		9		ns
Turn-On Rise Time	t_r			11		
Turn-Off Delay Time	$t_{d(off)}$			72		
Turn-Off Fall Time	t_f			33		
Source-Drain Diode Characteristics						
Diode Forward Voltage ⁴	V_{SD}	$V_{GS} = 0V, I_S = 10A$			1.2	V

Notes :


- 1.The maximum current rating is limited by package. And device mounted on a large heatsink.
- 2.Pulse Test : Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.EAS condition: V_{DD} = 20V, V_{GS} = 10V, L = 0.5mH, R_G = 25Ω Starting T_J = 25°C.
- 4.Pulse Test : Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 5.The power dissipation P_D is limited by T_{J(MAX)} = 150°C. And device mounted on a large heatsink.
- 6.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A = 25°C.

Typical Characteristics

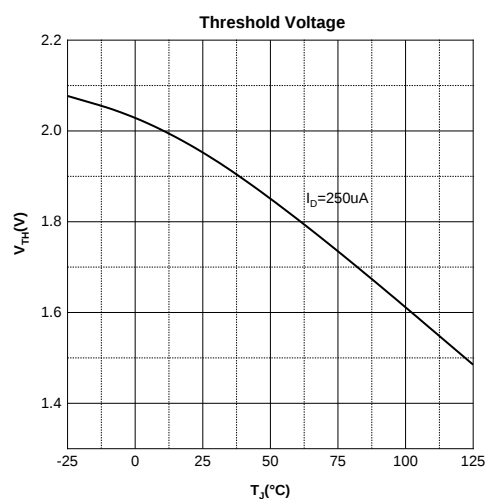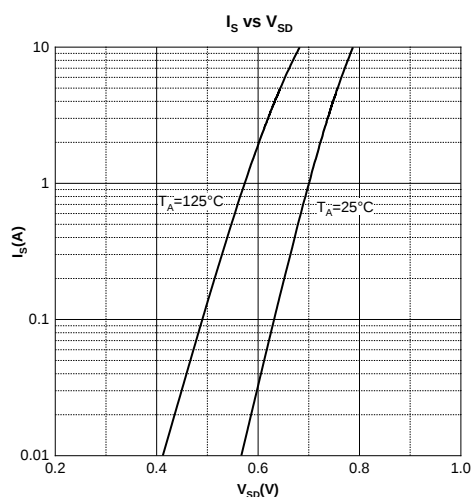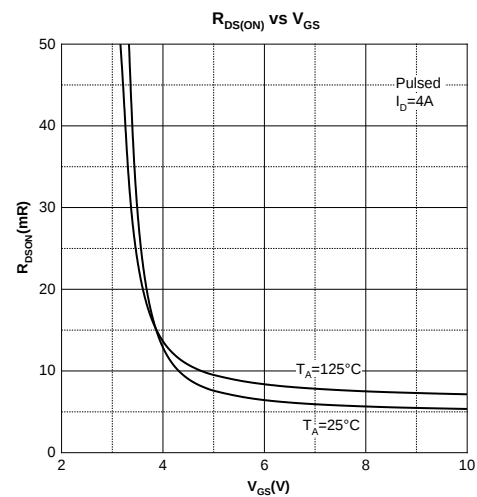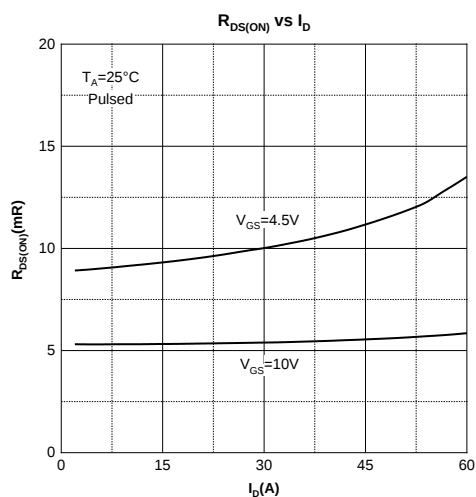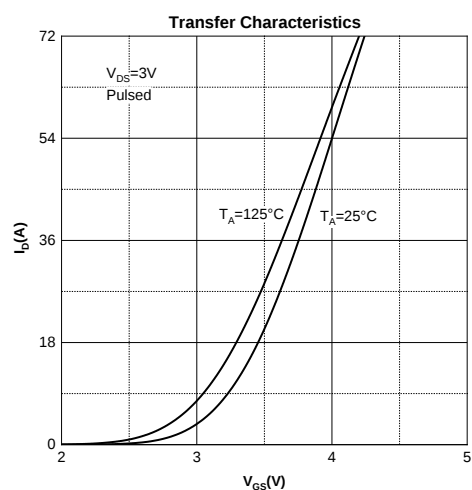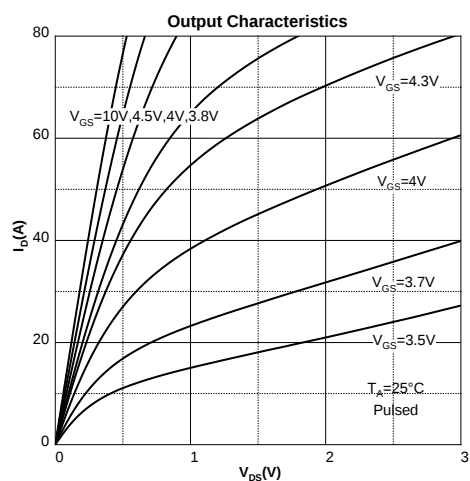


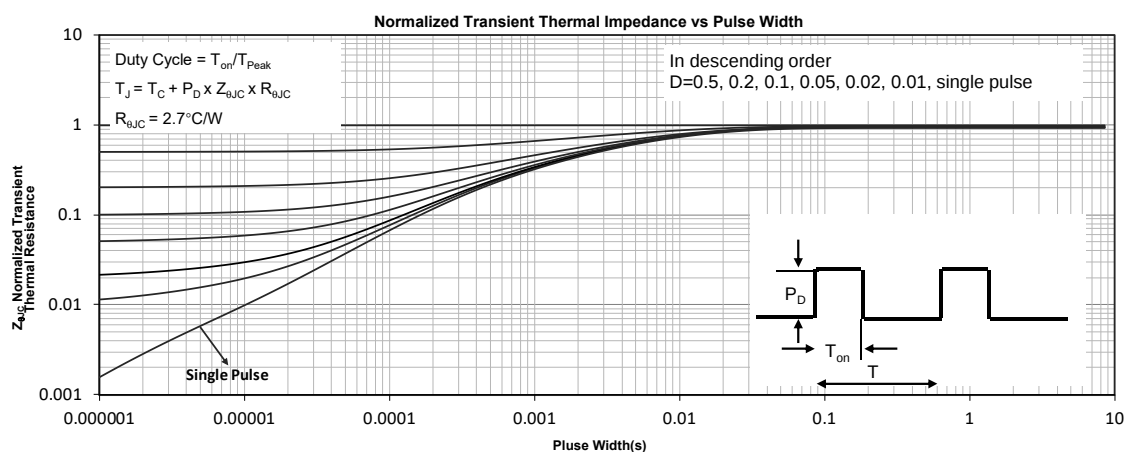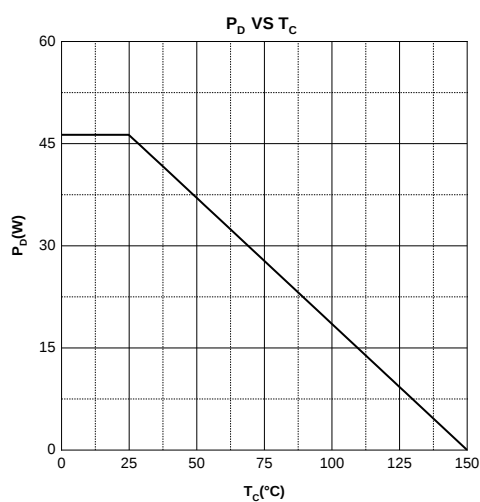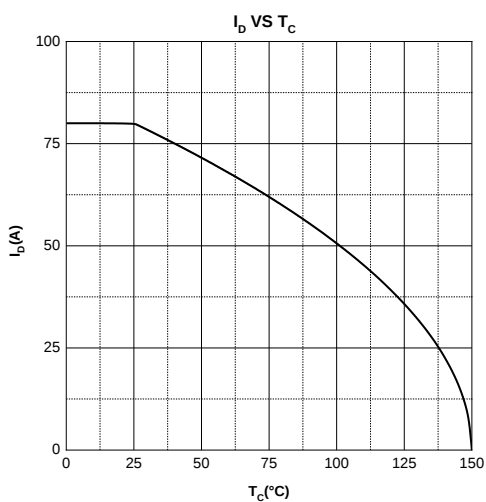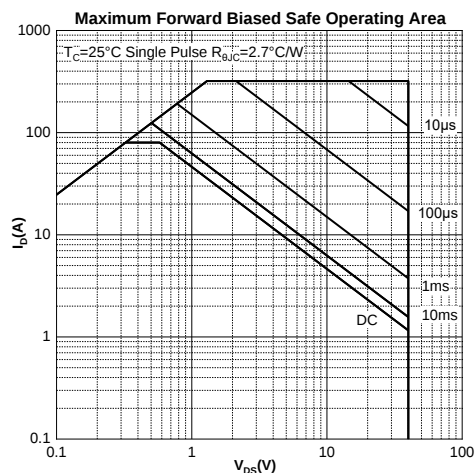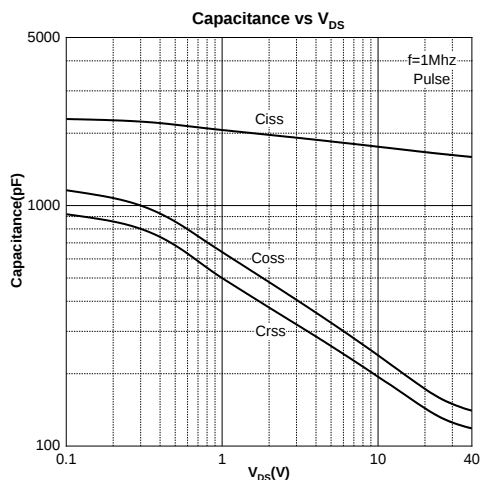


Gate Charge Test Circuit & Waveform

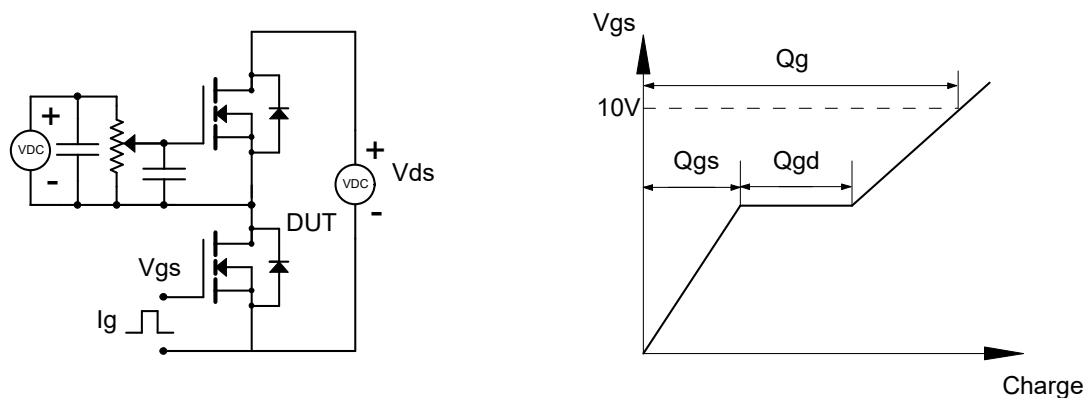


Resistive Switching Test Circuit & Waveform

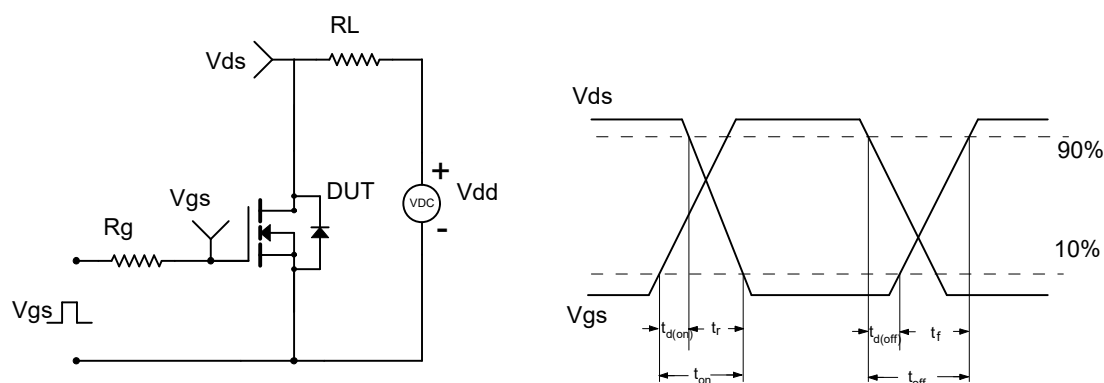

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

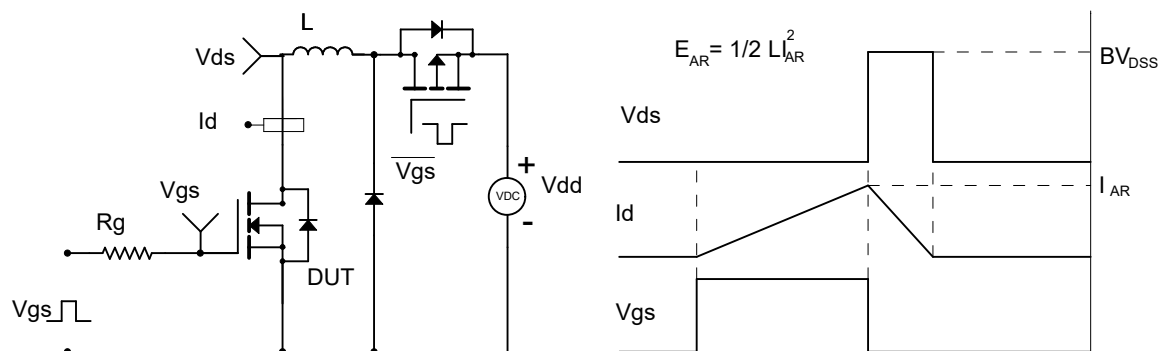

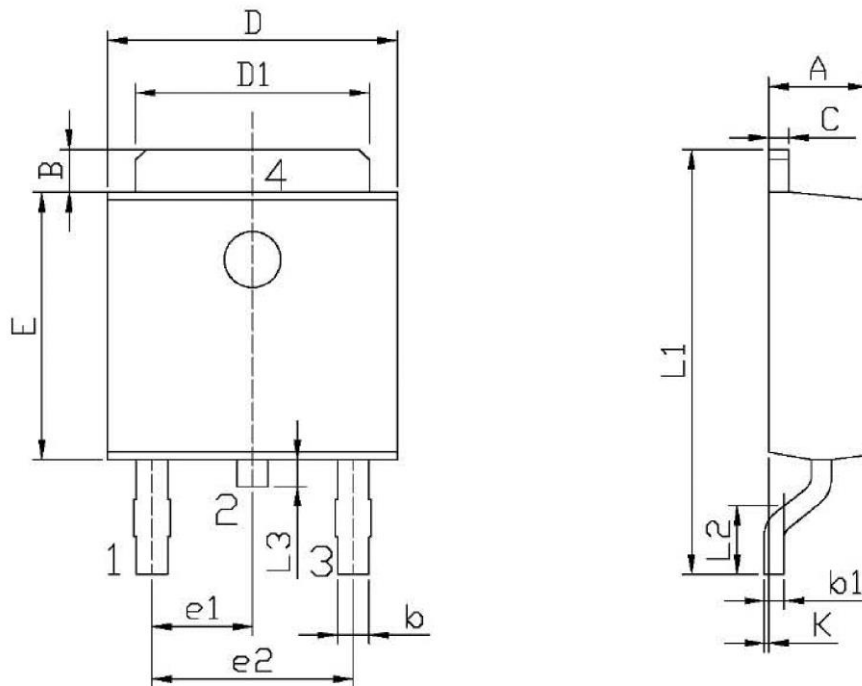TO-252-2L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
B	0.950	1.250	0.037	0.049
b	0.500	0.700	0.020	0.028
b1	0.450	0.550	0.018	0.022
C	0.450	0.550	0.018	0.022
D	6.450	6.750	0.254	0.266
D1	5.100	5.500	0.201	0.217
E	5.950	6.250	0.234	0.246
e1	2.240	2.340	0.088	0.092
e2	4.430	4.730	0.174	0.186
L1	9.450	9.950	0.372	0.392
L2	1.250	1.750	0.049	0.069
L3	0.600	0.900	0.024	0.035
K	0.000	0.100	0.000	0.004

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.