

SS52B-SS520B Schottky Rectifier
Feature


- High current capability
- Low V_F
- High surge current capability

Application

- Rectifier

Marking

- SS5X
X: From 2 To 20

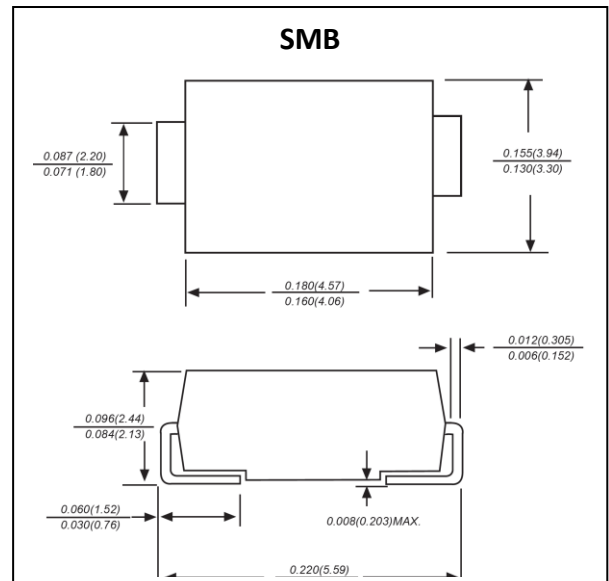
ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symb ol	SS5									Unit
		2	3	4	5	6	8	10	15	20	
Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V
Average Forward Current (60HZ Half-Sine Wave, Resistance Load, TL(Fig.1))	I _{F(AV)}	5.0									A
Non-repetitive Peak Forward Surge Current (60Hz Half-Sine Wave , 1 Cycle ,T _A =25℃)	I _{FSM}	150									A
Junction Temperature	T _J	-65 ~ +125			-65 ~ +150						℃
Storage Temperature	T _{STG}	-65 ~ +150									℃

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition		SS5								Unit
				2	3	4	5	6	8	10	15	
Peak Forward Voltage	V _F	I _F =5A		0.55		0.70		0.85		0.95		V
Peak Reverse Current	I _{RRM1}	V _{RM} =V _{RRM}	T _A =25℃	0.5				0.1				mA
	T _A =100℃		10				5.0				mA	
Thermal Resistance(Typical)	R _{θJ-A}	Between Junction and Ambient		60								℃/W
	R _{θJ-L}	Between Junction and Terminal		20								℃/W

Note:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.60" x 0.60" (16.0 mm x 16.0 mm) copper pad areas.

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

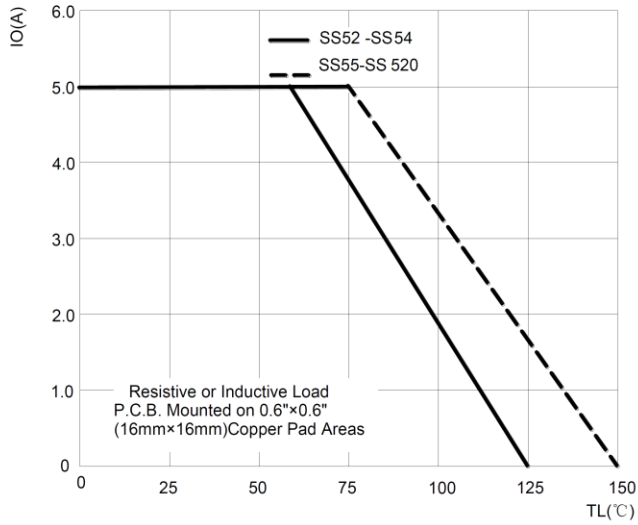


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

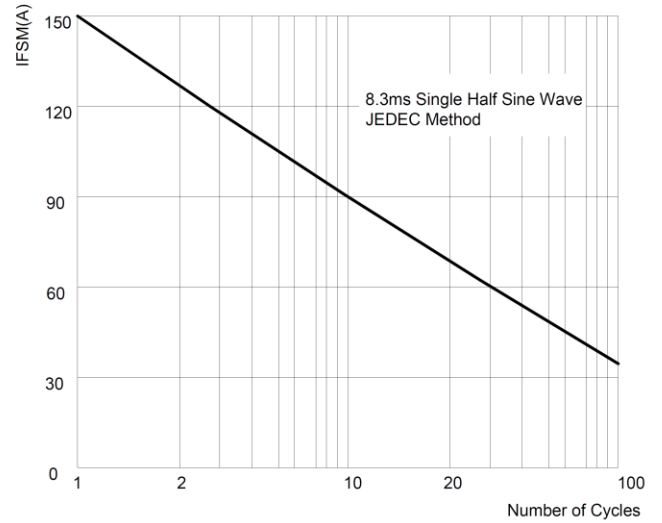


FIG.3: TYPICAL FORWARD CHARACTERISTICS


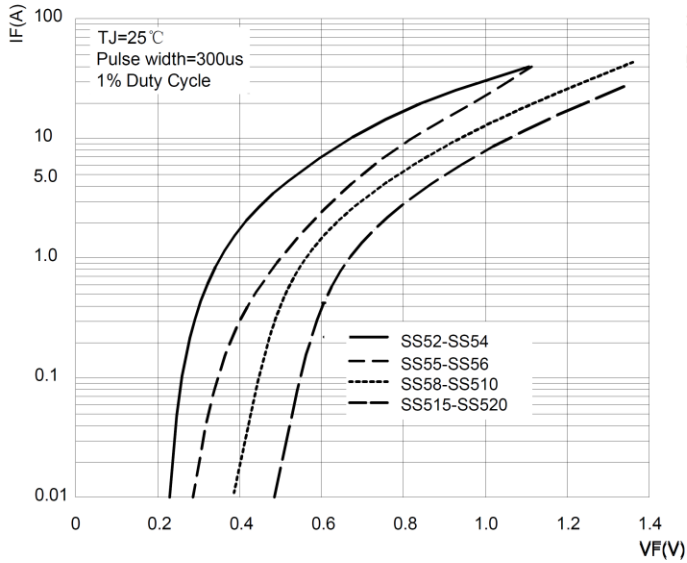


FIG.4: TYPICAL REVERSE CHARACTERISTICS

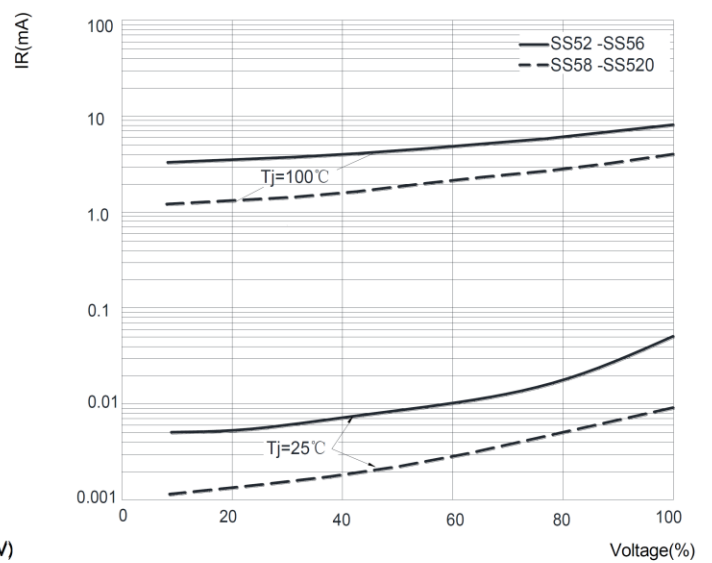

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.