



Product Summary

V _{(BR)DSS}	R _{DS(on)TYP}	I _D
50V	0.92Ω@10V	0.3A
	0.98Ω@4.5V	
	1.2Ω@2.5V	



Feature

- Trench Technology Power MOSFET
- Low R_{DS(ON)}
- Low Gate Charge
- ESD Protected

Application

- Load Switch
- DC/DC Converter

MARKING

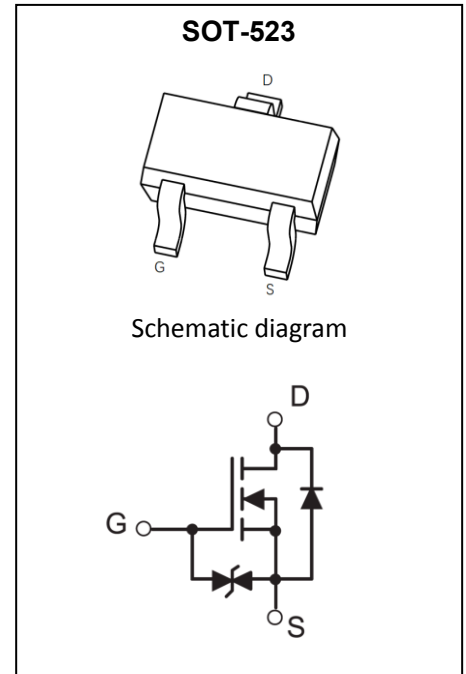

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Drain - Source Voltage		V _{DS}	50	V
Gate - Source Voltage		V _{GS}	±20	V
Continuous Drain Current ^{1,4}	T _A = 25°C	I _D	0.3	A
	T _A = 85°C	I _D	0.2	
Pulsed Drain Current ²		I _{DM}	1.2	
Power Dissipation ^{4,5}		P _D	0.25	W
Thermal Resistance from Junction to Ambient ⁵		R _{θJA}	500	°C/W
Junction Temperature		T _J	150	°C
Storage Temperature		T _{STG}	-55~ +150	°C







MOSFET ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	50			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 50V, V _{GS} = 0V			1	μA
Gate - Body Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±2	μA
On Characteristics³						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	0.6	0.9	1.5	V
Drain-source On-resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 0.3A		0.92	2.5	Ω
		V _{GS} = 4.5V, I _D = 0.2A		0.98	3	
		V _{GS} = 2.5V, I _D = 0.01A		1.2	4.5	
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} = 15V, V _{GS} = 0V, f = 1MHz		30		pF
Output Capacitance	C _{oss}			5.2		
Reverse Transfer Capacitance	C _{rss}			3.3		
Gate Resistance	R _g	V _{DS} = 0V, V _{GS} = 0V, f = 1MHz		157		
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} = 5V, V _{GS} = 5V, I _D = 10mA, R _G = 10Ω, R _L = 500Ω		15		ns
Turn-on Rise Time	t _r			35		
Turn-off Delay Time	t _{d(off)}			80		
Turn-off Fall Time	t _f			80		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V _{SD}	V _{GS} = 0V, I _S = 0.3A			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width ≤ 10μs, duty cycle ≤ 1%.
- 3.Pulse Test : Pulse Width ≤ 300μs, duty cycle ≤ 2%.
- 4.The power dissipation P_D is limited by T_{J(MAX)} = 150°C.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C.

Typical Characteristics

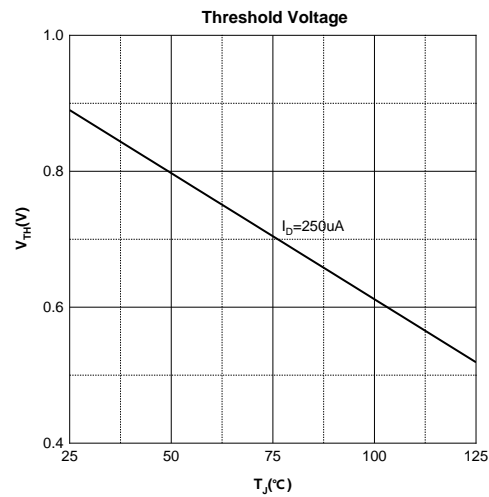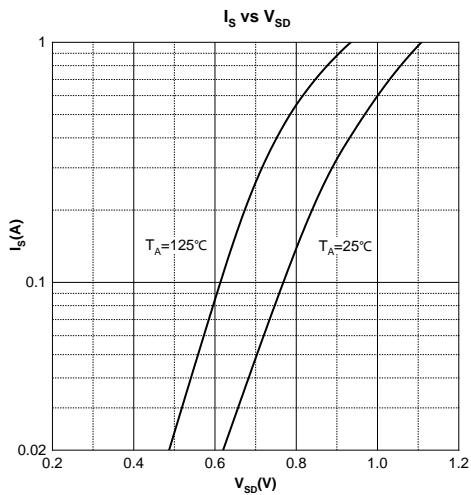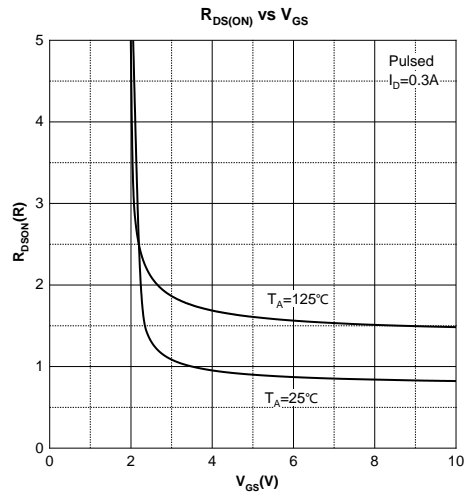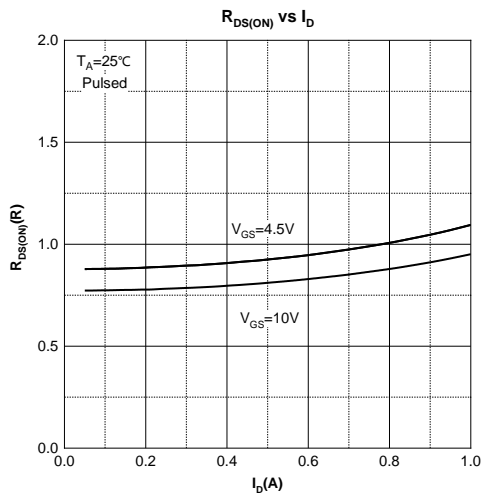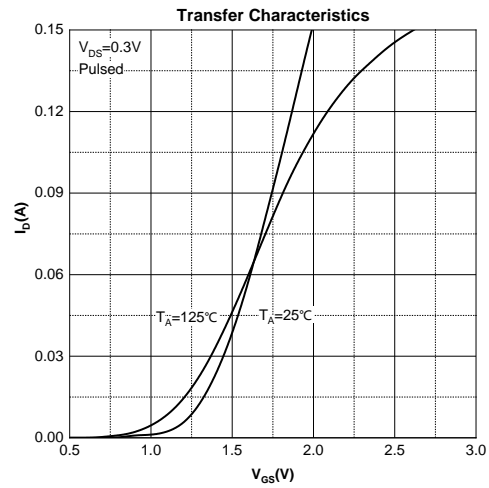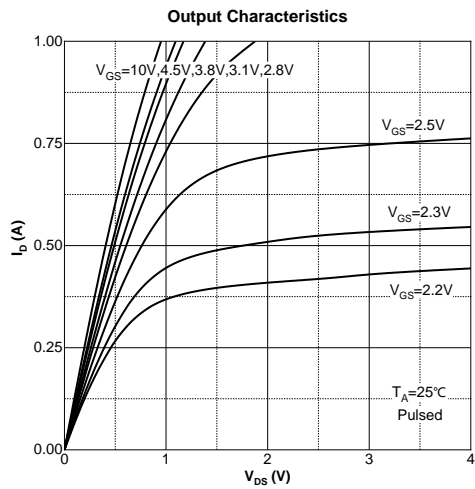

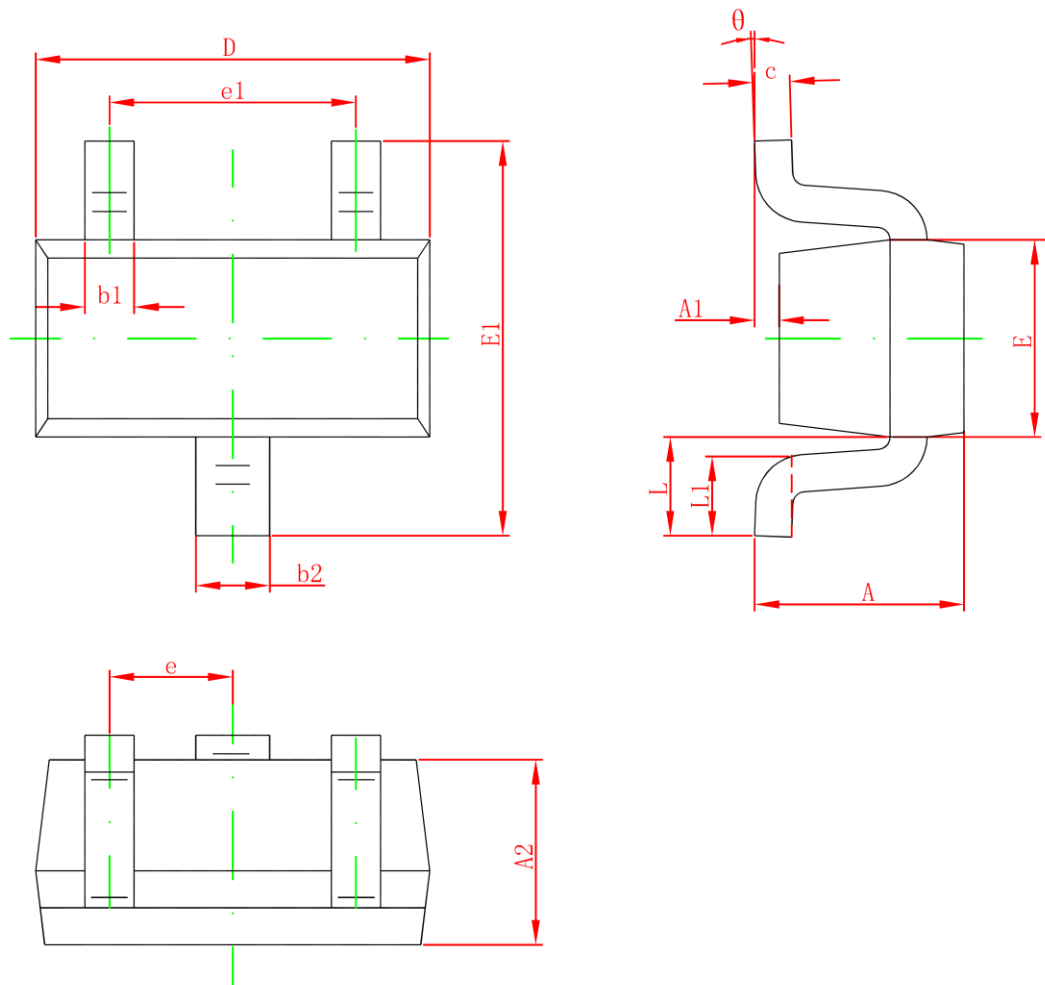SOT-523 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e1	0.900	1.100	0.035	0.043
e	0.500TYP		0.020TYP	
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

Attention:

- GreenPower Electronics reserves the right to improve product design function and reliability without notice.
- Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.
- GreenPower Electronics products belong to consumer electronics or other civilian electronic products.