







MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	100			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 80V, V _{GS} = 0V			1	μA
Gate - Body Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V			±100	nA
On Characteristics ³						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1	2	3	V
Drain-source On-resistance	R _{DS(on)}	V _{GS} = 10V, I _D = 1A		70	90	mΩ
		V _{GS} = 4.5V, I _D = 1A		88	135	
Forward Transconductance	g _{FS}	V _{DS} = 5V, I _D =3A		5		S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} = 45V, V _{GS} = 0V, f = 1MHz		849		pF
Output Capacitance	C _{oss}			34		
Reverse Transfer Capacitance	C _{rss}			31		
Switching Characteristics						
Total Gate Charge	Q _g	V _{DS} = 50V, V _{GS} =10V, I _D = 1A		21.5		nC
Gate-source Charge	Q _{gs}			5.9		
Gate-drain Charge	Q _{gd}			2.4		
Turn-on Delay Time	t _{d(on)}	V _{DD} = 50V, V _{GS} = 10V, R _L = 19Ω, R _G = 3Ω		6		ns
Turn-on Rise Time	t _r			4		
Turn-off Delay Ttime	t _{d(off)}			20		
Turn-off Fall Time	t _f			4		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V _{SD}	V _{GS} = 0V, I _S = 1A			1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Repetitive rating:pulse width limited by $T_{J(MAX)} = 150^\circ\text{C}$.
- 3.Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
- 4.The power dissipation PD is limited by $T_{J(MAX)} = 150^\circ\text{C}$.
- 5.Device mounted on 1in2 FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

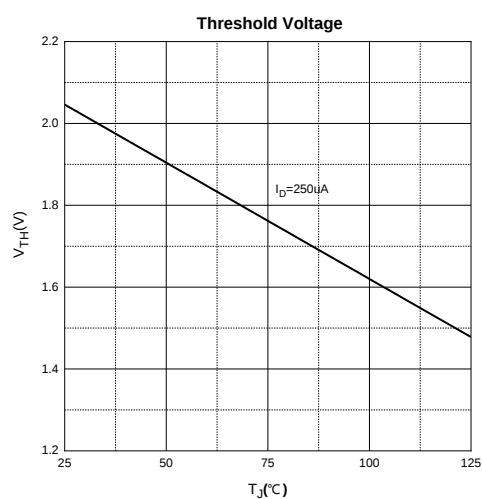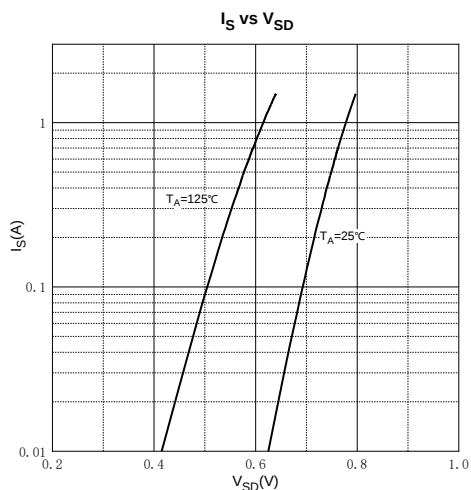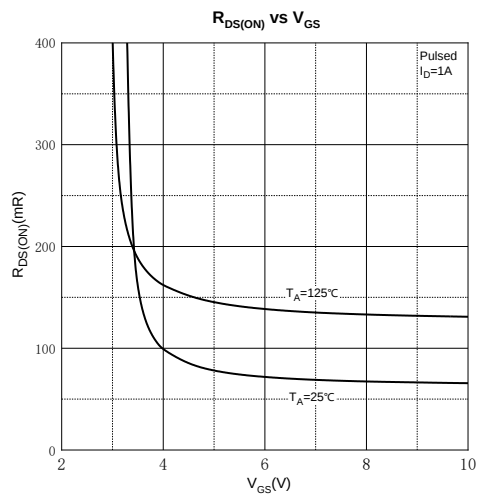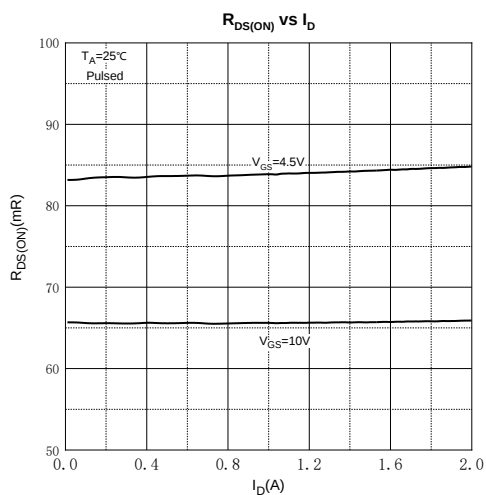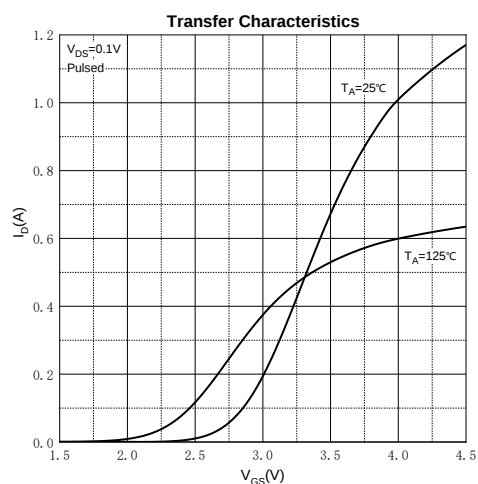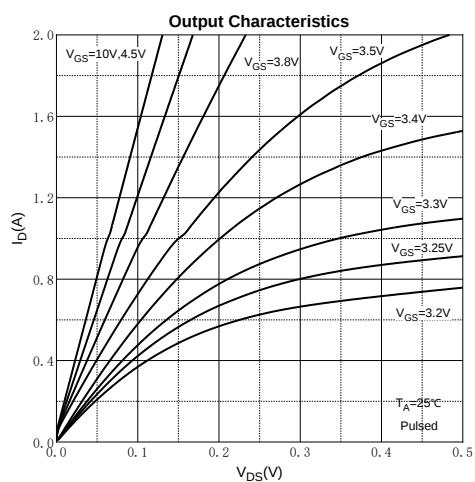

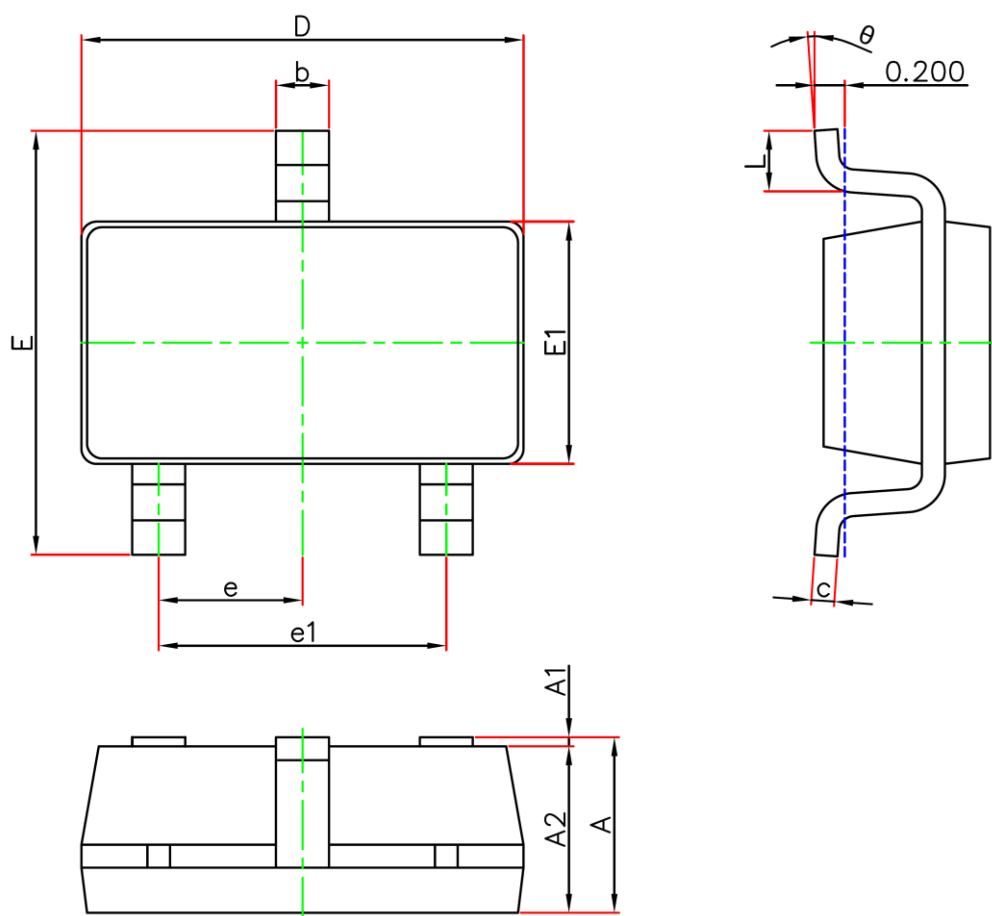SOT-23-3L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0	0.150	0.000	0.006
A2	1.050	1.250	0.041	0.049
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	2.650	2.950	0.104	0.116
E1	1.500	1.700	0.059	0.067
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°