



GP
ELECTRONICS

GP4001
40V P-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-40V	61mΩ@-10V	-5A
	81mΩ@-4.5V	



Feature

- Trench Technology Power MOSFET
- Low $R_{DS(ON)}$
- Low Gate Charge

Application

- Load Switch
- DC/DC Converter

MARKING:

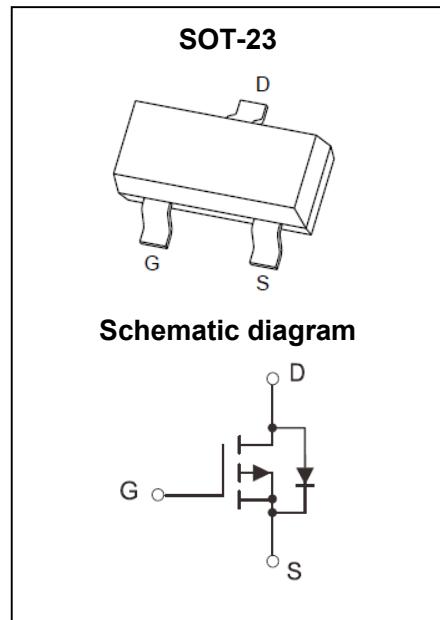

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	-40	V
Gate - Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ^{1,5}	I_D	-5	A
		-3	
Pulsed Drain Current ²	I_{DM}	-20	A
Power Dissipation ^{4,5}	P_D	0.83	W
Thermal Resistance from Junction to Ambient ⁵	$R_{\theta JA}$	150	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C







MOSFET ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Off Characteristics						
Drain - Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{GS} = 0V, I_D = -250\mu\text{A}$	-40			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -40V, V_{GS} = 0V$			-1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics³						
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-1	-1.5	-3	V
Drain-source On-resistance	$R_{DS(\text{on})}$	$V_{GS} = -10V, I_D = -3\text{A}$		61	88	$\text{m}\Omega$
		$V_{GS} = -4.5V, I_D = -3\text{A}$		81	100	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = -20V, V_{GS} = 0V, f = 1\text{MHz}$		441		pF
Output Capacitance	C_{oss}			50		
Reverse Transfer Capacitance	C_{rss}			41		
Gate Resistance	R_g	$V_{DS} = 0V, V_{GS} = 0V, f = 1\text{MHz}$		32.6		Ω
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = -15V, V_{GS} = -10V, I_D = -5\text{A}$		10.1		nC
Gate-source Charge	Q_{gs}			1.3		
Gate-drain Charge	Q_{gd}			2.4		
Turn-on Delay Time	$t_{d(\text{on})}$	$V_{DD} = -20V, V_{GS} = -10V, I_D = -5\text{A}, R_G = 2.4\Omega$		7		ns
Turn-on Rise Time	t_r			20		
Turn-off Delay Time	$t_{d(\text{off})}$			15		
Turn-off Fall Time	t_f			21		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_s = -4\text{A}$			-1.2	V

Notes :

- 1.The maximum current rating is limited by package.
- 2.Pulse Test : Pulse Width $\leq 10\mu\text{s}$, duty cycle $\leq 1\%$.
- 3.Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- 4.The power dissipation P_D is limited by $T_{J(\text{MAX})} = 150^\circ\text{C}$.
- 5.Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

Typical Characteristics

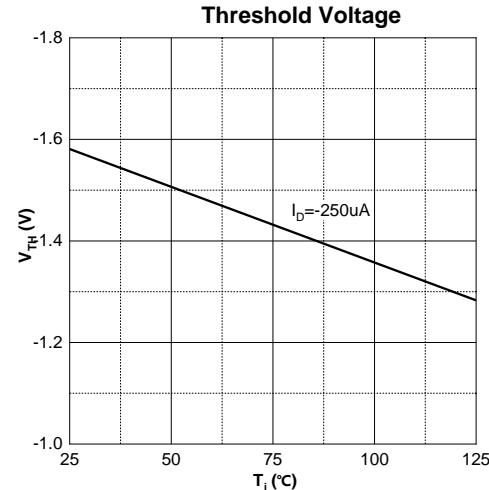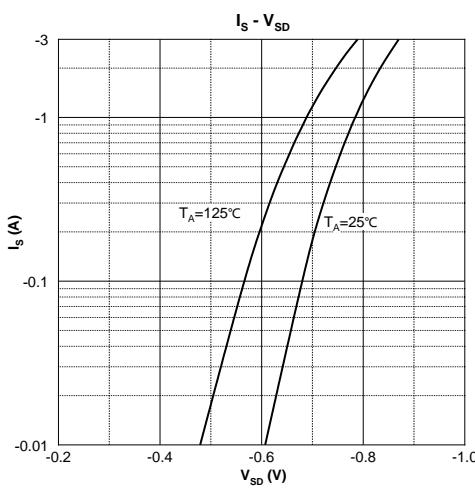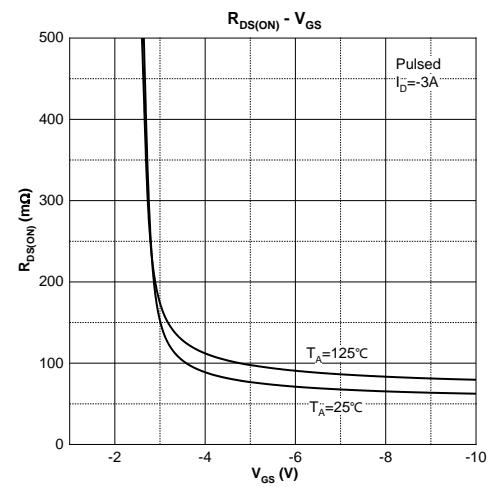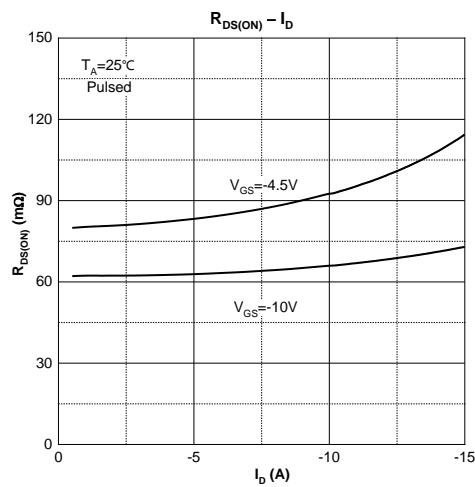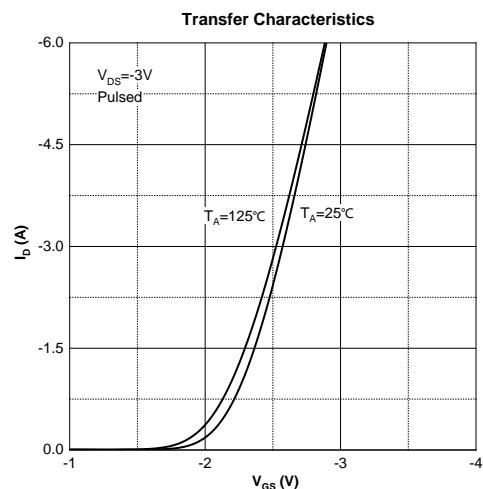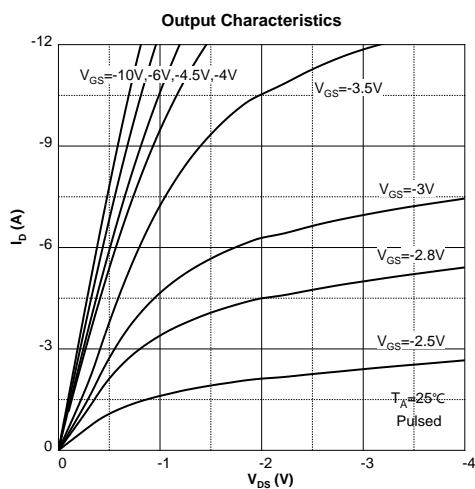

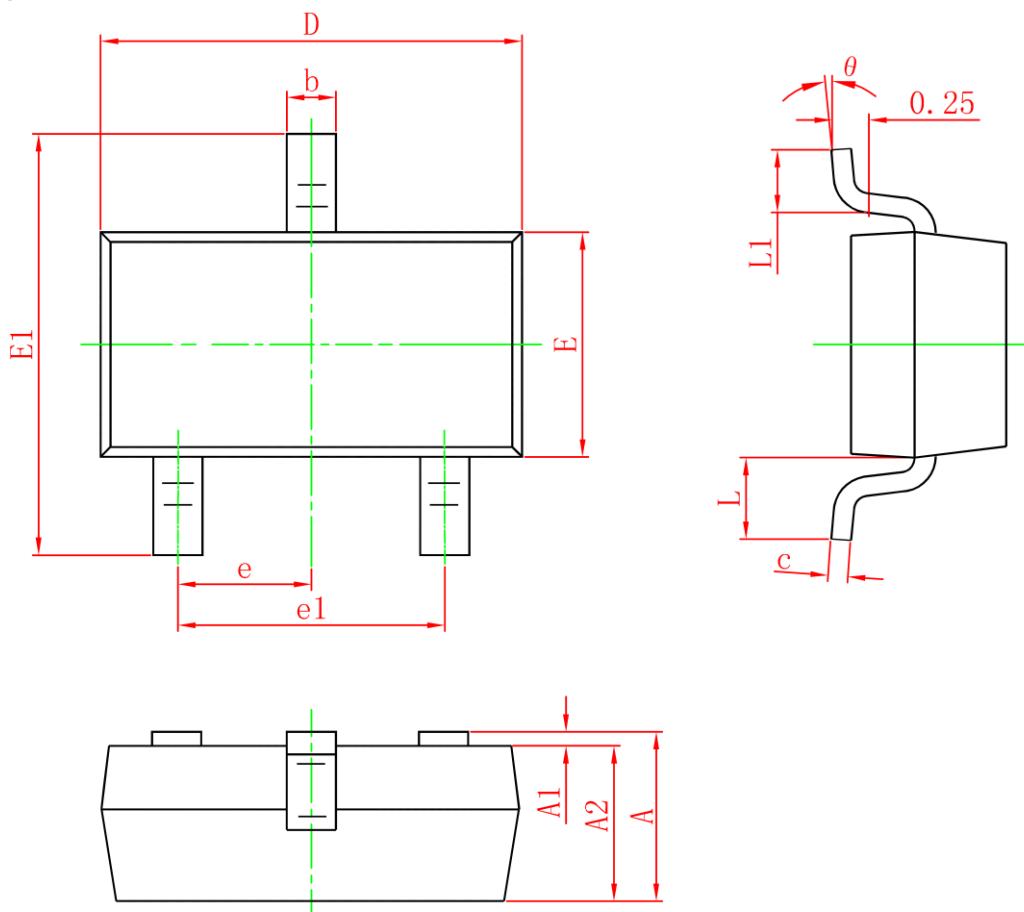SOT-23 Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0	0.100	0	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.150	1.500	0.045	0.059
E1	2.250	2.650	0.089	0.104
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
theta	0°	8°	0°	8°